

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3162A


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	11.00	20.5	2935	35.8

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P_L [W]	Relative losses P_L/P_N [%]	Voltage [V]
P1 (90/100)	1029	9.35	361
P2 (50/100)	844	7.67	210
P3 (25/100)	756	6.87	114
P4 (90/50)	456	4.15	351
P5 (50/50)	324	2.95	199
P6 (50/25)	195	1.77	195
P7 (25/25)	135	1.23	100

Map of losses - relative losses P_L/P_N [%]

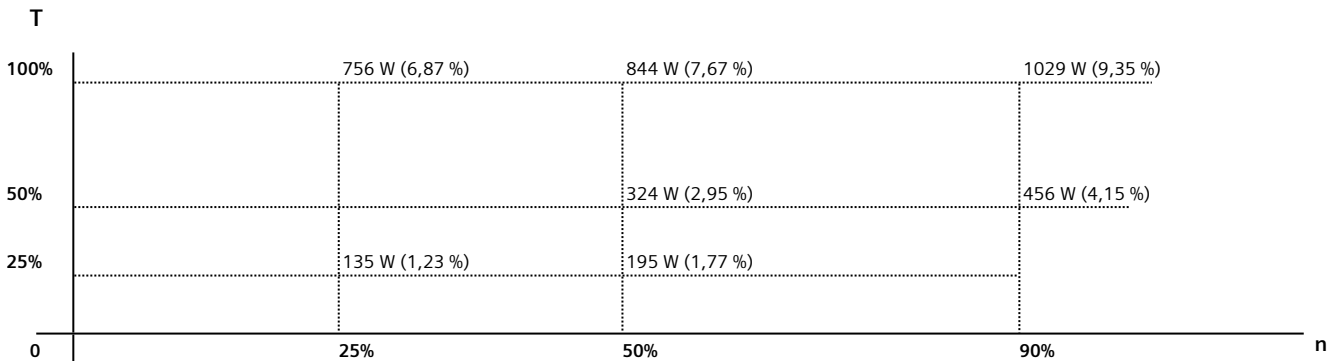


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department IN LVM	Technical reference	Created by	Approved by				
	Document type Datasheet	Document status Released					
	Document title 1TL0013-1DA23-3AA4-Z	Document number					
© INNOMOTICS 2024	W12	Revision 743	Creation date 2024-10-31 06:48		Language en	Page 1/1	