

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3162B


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	11.00	21.5	1465	72.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	1049	9.54	361
P2 (50/100)	869	7.9	210
P3 (25/100)	770	7	114
P4 (90/50)	490	4.45	352
P5 (50/50)	362	3.29	200
P6 (50/25)	236	2.15	195
P7 (25/25)	165	1.5	100

Map of losses - relative losses P_L/P_N [%]

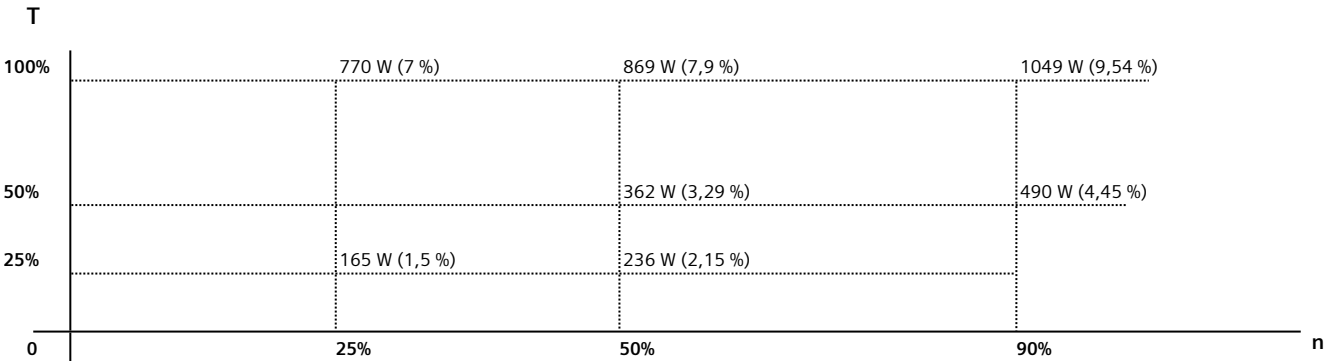

Notes:							
T as relative T: T/T _N [%]				-1: at 40 degrees Celsius and 1000 meters			
n as relative n: n/n _N [%]							
Responsible department	Technical reference	Created by	Approved by				
IN LVM							
	Document type			Document status			
	Datasheet			Released			
	Document title			Document number			
1TL0013-1DB23-3AA4-Z							
W12			Revision	Creation date	Language	Page	
© INNOMOTICS 2024			743	2024-10-31 06:48	en	1/1	