

## Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3252A


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks
---------

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Δ	50	55.00	100	2975	177.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	3087	5.61	361
P2 (50/100)	2031	3.69	204
P3 (25/100)	1592	2.89	106
P4 (90/50)	1776	3.23	356
P5 (50/50)	955	1.74	199
P6 (50/25)	687	1.25	197
P7 (25/25)	384	0.7	100

Map of losses - relative losses  $P_L/P_N$  [%]

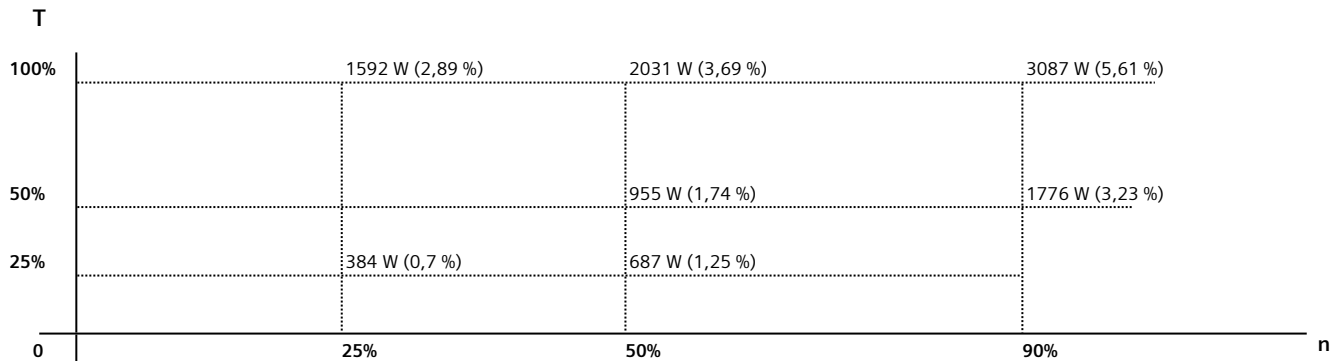


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department IN LVM	Technical reference	Created by	Approved by					
	Document type Datasheet			Document status Released				
	Document title 1TL0013-2CA23-3AA4-Z			Document number				
© INNOMOTICS 2024	W12		Revision 743	Creation date 2024-10-31 06:54		Language en	Page 1/1	