

## Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3252C


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks
---------

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Δ	50	37.00	72	985	359.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	2715	7.34	363
P2 (50/100)	2134	5.77	206
P3 (25/100)	1818	4.91	109
P4 (90/50)	1403	3.79	353
P5 (50/50)	976	2.64	199
P6 (50/25)	691	1.87	196
P7 (25/25)	466	1.26	99

Map of losses - relative losses  $P_L/P_N$  [%]

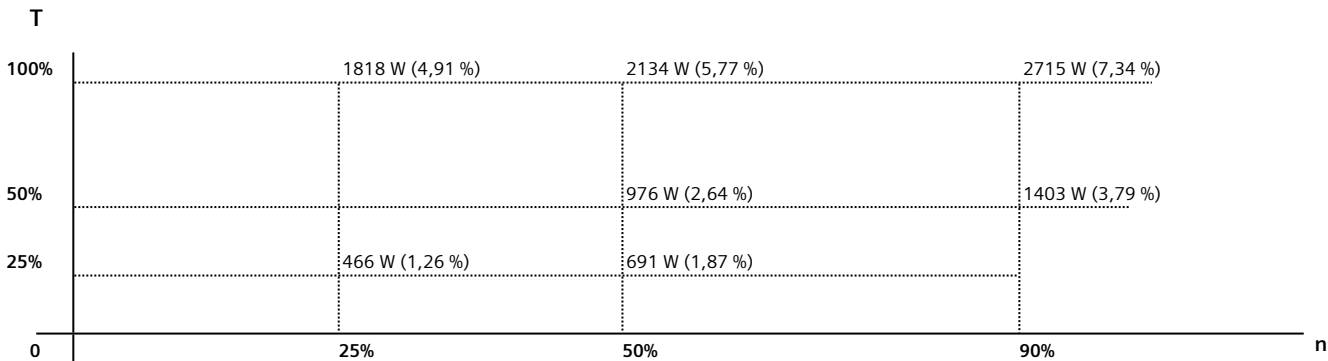


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department IN LVM	Technical reference	Created by	Approved by			
	Document type Datasheet	Document status Released				
	Document title 1TL0013-2CC23-3AA4-Z	Document number				
© INNOMOTICS 2024	W12	Revision 743	Creation date 2024-10-31 06:54	Language en	Page 1/1	