

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3082A

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Y	50	0.75	1.64	2835	2.5

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	165	22	365
P2 (50/100)	138	18.4	222
P3 (25/100)	123	16.4	132
P4 (90/50)	78	10.4	343
P5 (50/50)	57	7.6	200
P6 (50/25)	36	4.8	190
P7 (25/25)	27	3.6	101

Map of losses - relative losses P_L/P_N [%]

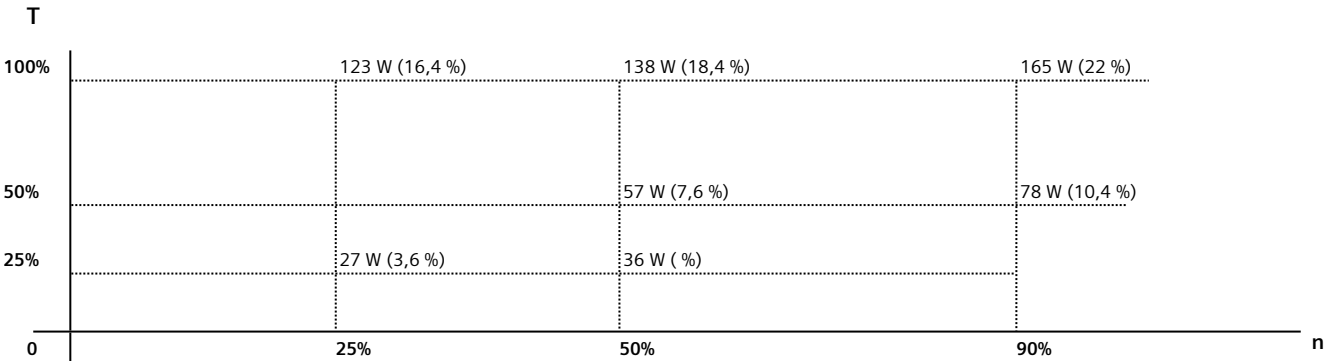


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL0013-ODA22-1AA4-Z							
	W12				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 06:29	en	1/1