

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4184B8

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	22.00	43	1480	142.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	1319	6	343
P2 (50/100)	1058	4.81	194
P3 (25/100)	892	4.05	102
P4 (90/50)	676	3.07	336
P5 (50/50)	503	2.29	189
P6 (50/25)	367	1.67	187
P7 (25/25)	252	1.15	94

Map of losses - relative losses P_L/P_N [%]

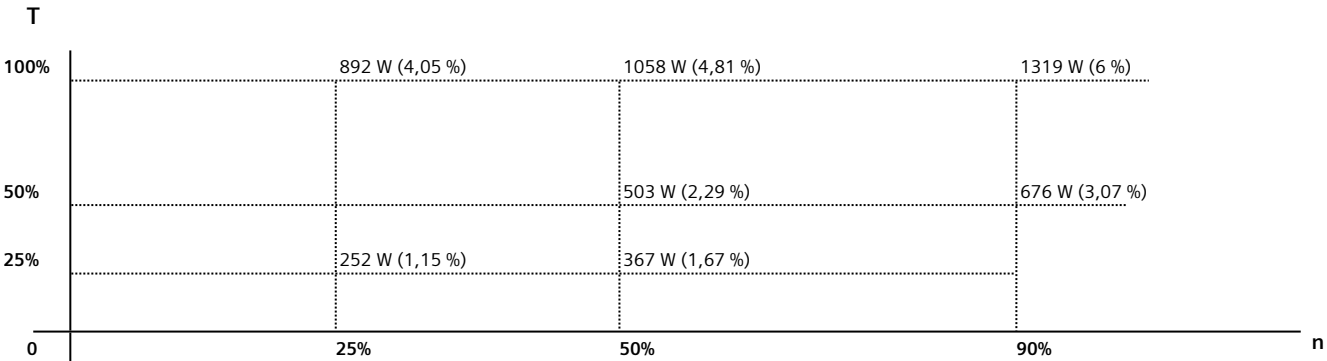


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL8014-1EB43-3AA4-Z							
	D24				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 07:13	en	1/1