

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4104C8

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Y	50	1.50	3.75	975	14.7

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	233	15.53	344
P2 (50/100)	201	13.4	201
P3 (25/100)	182	12.13	111
P4 (90/50)	132	8.8	333
P5 (50/50)	107	7.13	190
P6 (50/25)	84	5.6	185
P7 (25/25)	69	4.6	96

Map of losses - relative losses P<sub>L</sub>/P<sub>N</sub> [%]

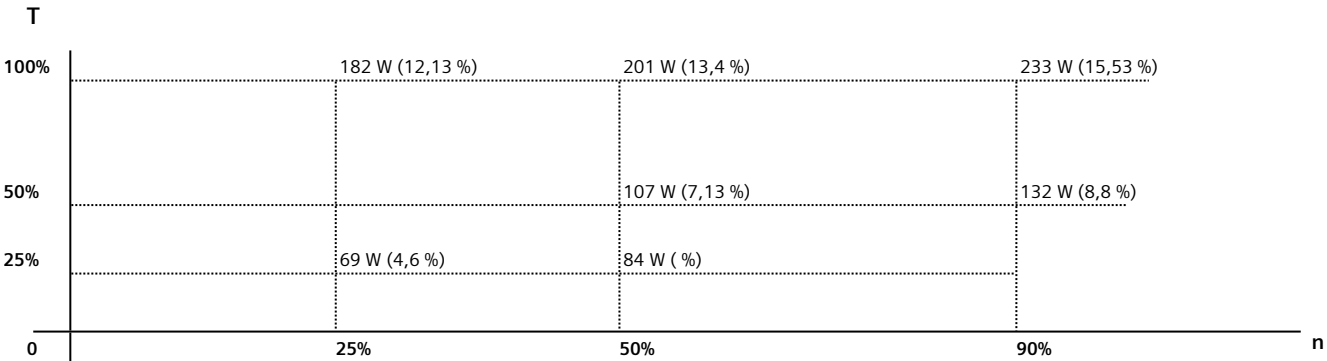


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department	Technical reference	Created by	Approved by		
IN LVM					
	Document type	Document status			
	Datasheet				
	Document title	Document number			
	1TL8014-1AC42-1AA4-Z				
	D24	Revision	Creation date	Language	Page
© INNOMOTICS 2024		743	2024-10-31 07:09	en	1/1