

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV4204C8


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	18.50	37.5	988	179.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	1465	7.92	342
P2 (50/100)	1223	6.61	196
P3 (25/100)	1020	5.51	103
P4 (90/50)	806	4.36	335
P5 (50/50)	643	3.48	189
P6 (50/25)	499	2.7	186
P7 (25/25)	335	1.81	95

Map of losses - relative losses P_L/P_N [%]

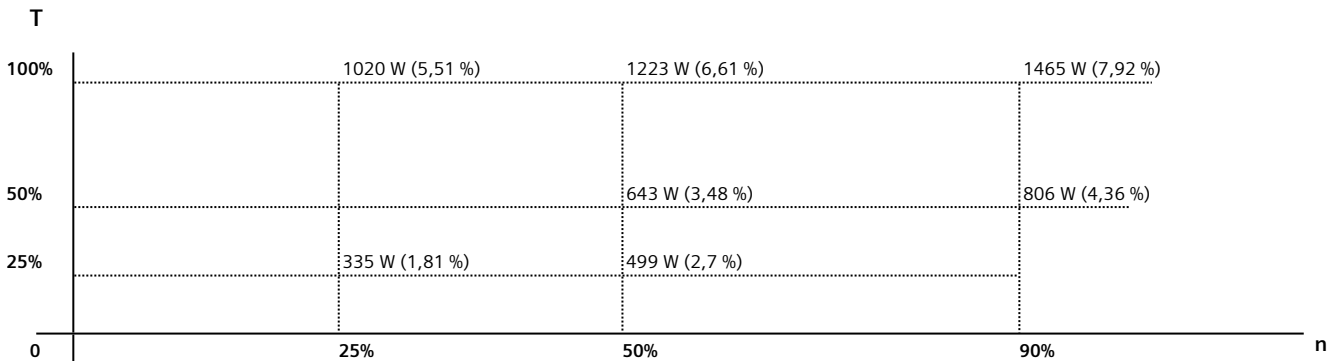


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department IN LVM	Technical reference	Created by	Approved by			
	Document type Datasheet		Document status Released			
	Document title 1TL8014-2AC43-3AA4-Z		Document number			
© INNOMOTICS 2024	D24	Revision 743	Creation date 2024-10-31 07:15		Language en	Page 1/1