

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3204C

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	18.50	38.5	978	181.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	1770	9.57	361
P2 (50/100)	1465	7.92	208
P3 (25/100)	1302	7.04	112
P4 (90/50)	869	4.7	352
P5 (50/50)	649	3.51	199
P6 (50/25)	451	2.44	195
P7 (25/25)	331	1.79	100

Map of losses - relative losses P_L/P_N [%]

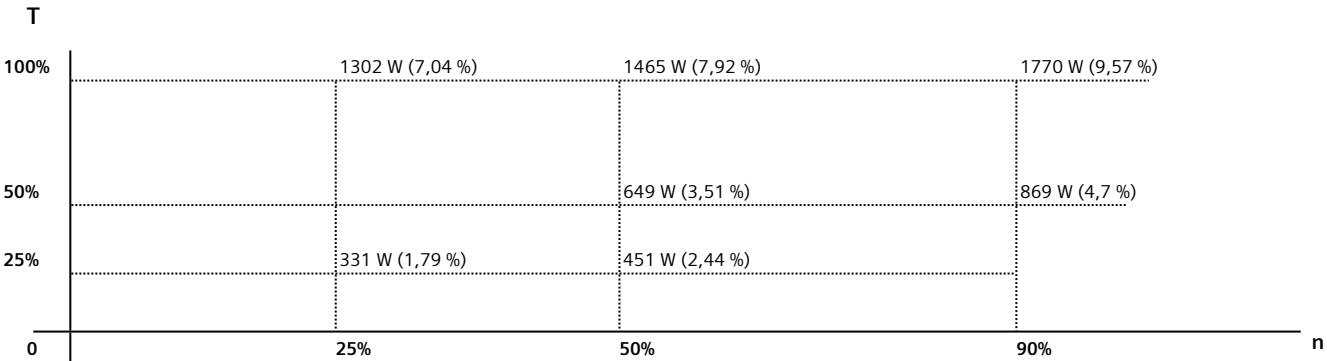


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL0013-2AC43-3AA4-Z							
	W12				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 06:52	en	1/1