

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3204B


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	30.00	58	1475	194.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	2143	7.14	363
P2 (50/100)	1711	5.7	206
P3 (25/100)	1472	4.91	109
P4 (90/50)	1089	3.63	353
P5 (50/50)	780	2.6	199
P6 (50/25)	552	1.84	196
P7 (25/25)	381	1.27	100

Map of losses - relative losses P_L/P_N [%]

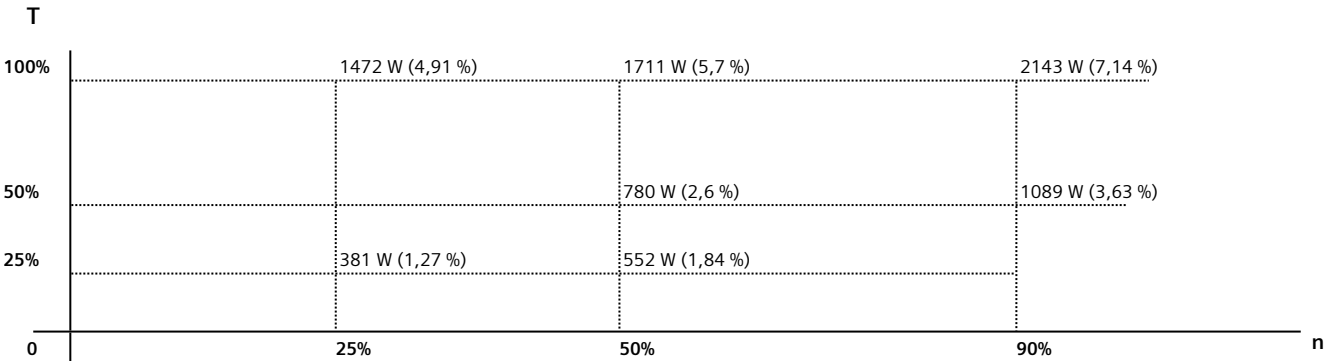

Notes:							
T as relative T: T/T _N [%]				-1: at 40 degrees Celsius and 1000 meters			
n as relative n: n/n _N [%]							
Responsible department	Technical reference	Created by	Approved by				
IN LVM							
	Document type			Document status			
	Datasheet			Released			
	Document title			Document number			
1TL0013-2AB43-3AA4-Z							
W12			Revision	Creation date	Language	Page	
© INNOMOTICS 2024			743	2024-10-31 06:52	en	1/1	