

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3353B

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	250.00	450	1490	1602.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	10621	4.25	361
P2 (50/100)	7171	2.87	203
P3 (25/100)	5422	2.17	104
P4 (90/50)	5972	2.39	357
P5 (50/50)	3529	1.41	199
P6 (50/25)	2629	1.05	198
P7 (25/25)	1432	0.57	100

Map of losses - relative losses P_L/P_N [%]

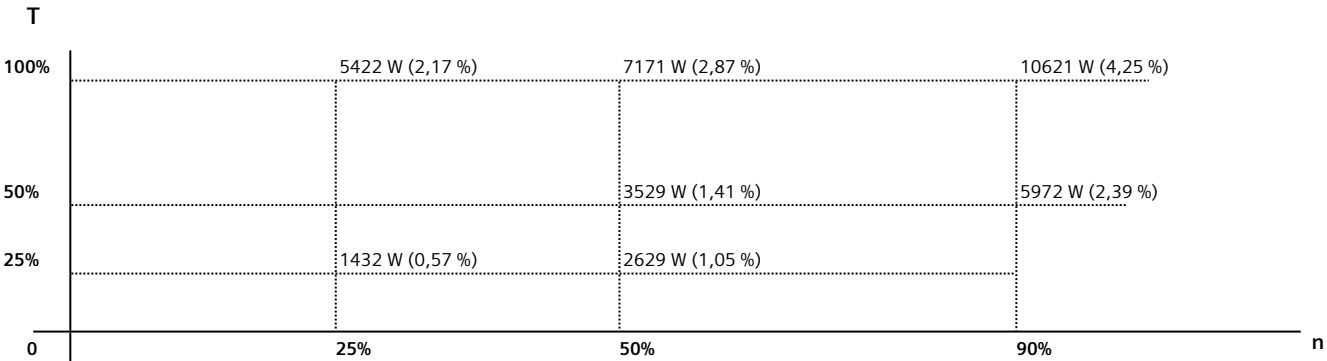


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by		
IN LVM					
	Document type			Document status	
	Datasheet			Released	
	Document title			Document number	
	1TL0013-3BB33-3AA4-Z				
	W12		Revision	Creation date	Language
© INNOMOTICS 2024			743	2024-10-31 06:56	en
					Page
					1/1