

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3352A


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	220.00	390	2986	704.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P_L [W]	Relative losses P_L/P_N [%]	Voltage [V]
P1 (90/100)	10402	4.73	360
P2 (50/100)	5707	2.59	202
P3 (25/100)	3879	1.76	103
P4 (90/50)	6866	3.12	357
P5 (50/50)	3085	1.4	199
P6 (50/25)	2432	1.11	198
P7 (25/25)	1120	0.51	99

Map of losses - relative losses P_L/P_N [%]

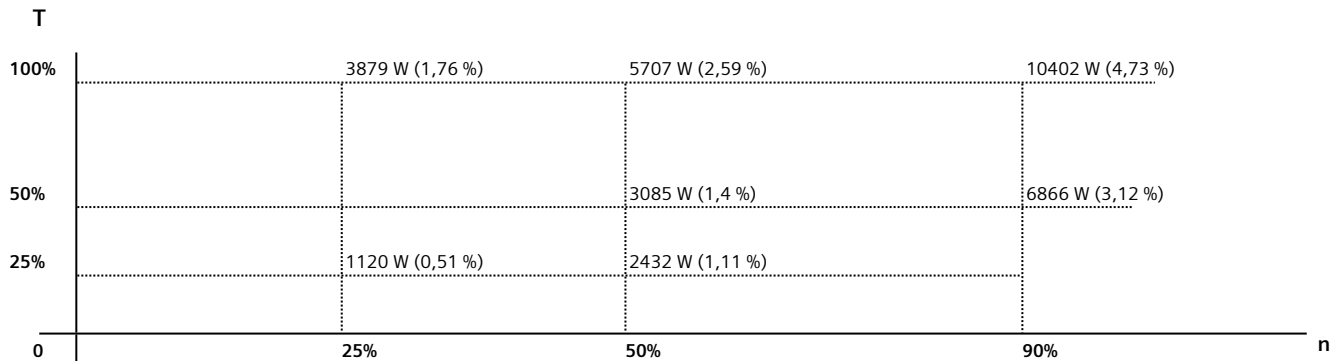


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department IN LVM	Technical reference	Created by	Approved by					
	Document type Datasheet				Document status Released			
	Document title 1TL0013-3BA23-3AA4-Z				Document number			
© INNOMOTICS 2024	W12				Revision 743	Creation date 2024-10-31 06:56	Language en	Page 1/1