

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors

Motor type: 0CV3355B


Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	280.00	500	1490	1795.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P_L [W]	Relative losses P_L/P_N [%]	Voltage [V]
P1 (90/100)	12324	4.4	361
P2 (50/100)	8418	3.01	203
P3 (25/100)	6382	2.28	104
P4 (90/50)	6991	2.5	357
P5 (50/50)	4216	1.51	199
P6 (50/25)	3176	1.13	198
P7 (25/25)	1752	0.63	100

Map of losses - relative losses P_L/P_N [%]

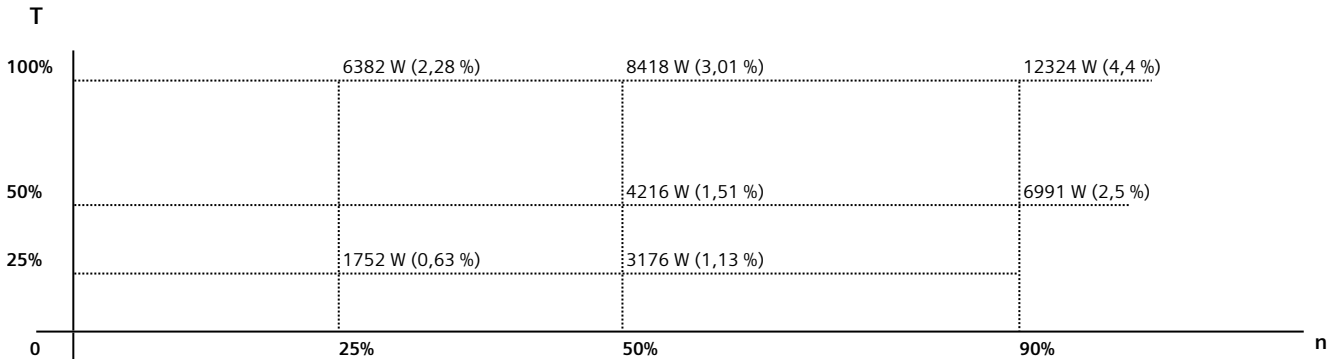


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department IN LVM	Technical reference	Created by	Approved by			
	Document type Datasheet			Document status Released		
	Document title 1TL0013-3BB53-3AA4-Z			Document number		
	W12	Revision 743	Creation date 2024-10-31 06:56	Language en	Page 1/1	
© INNOMOTICS 2024						