

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV4355C8

| | | |
|------------------|-----------------|-----------|
| Client order no. | Item-No. | Offer no. |
| Order no. | Consignment no. | Project |
| Remarks | | |

| General data ¹ | | | | | | |
|---------------------------|-----|---------------------|---------------------|--------------------|------------------------|---------------------|
| U _N [V] | D/Y | f _N [Hz] | P _N [kW] | I _N [A] | n _N [1/min] | T _N [Nm] |
| 380 | Δ | 50 | 220.00 | 415 | 994 | 2114.0 |

| Power losses acc. to COMMISSION REGULATION (EU) 2019/1781 | | | |
|---|---------------------------|--|-------------|
| Operating point | Losses P _L [W] | Relative losses P _L /P _N [%] | Voltage [V] |
| P1 (90/100) | 10083 | 4.58 | 343 |
| P2 (50/100) | 7563 | 3.44 | 193 |
| P3 (25/100) | 5780 | 2.63 | 99 |
| P4 (90/50) | 5702 | 2.59 | 338 |
| P5 (50/50) | 4045 | 1.84 | 189 |
| P6 (50/25) | 3179 | 1.45 | 188 |
| P7 (25/25) | 1857 | 0.84 | 95 |

Map of losses - relative losses P_L/P_N [%]

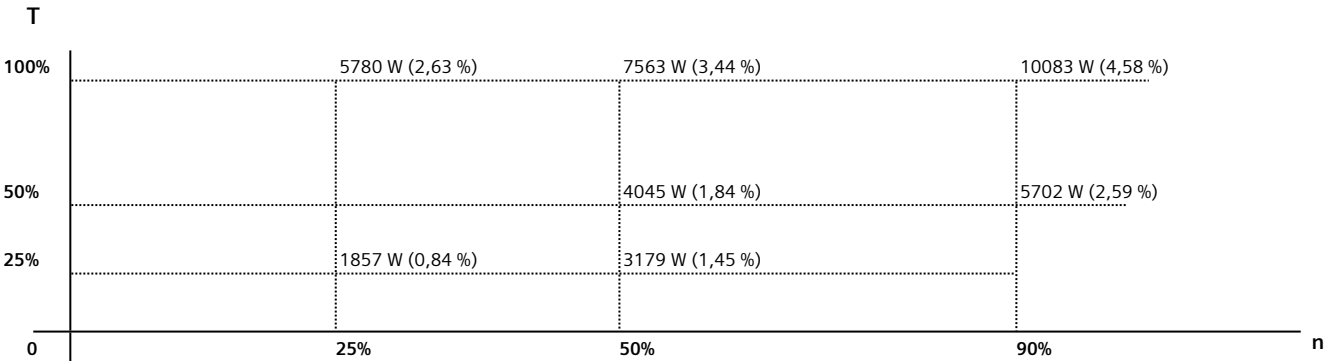


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

| | | | | | |
|--|----------------------|------------|-------------|------------------|-----------------|
| Responsible department | Technical reference | Created by | Approved by | | |
| IN LVM | | | | | |
|  | Document type | | | Document status | |
| | Datasheet | | | Released | |
| | Document title | | | Document number | |
| | 1TL8014-3BC53-3AA4-Z | | | | |
| | D24 | | Revision | Creation date | Language Page |
| © INNOMOTICS 2024 | | | 743 | 2024-11-01 01:32 | en 1/1 |