

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3220B

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data <sup>1</sup>						
U <sub>N</sub> [V]	D/Y	f <sub>N</sub> [Hz]	P <sub>N</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [1/min]	T <sub>N</sub> [Nm]
380	Δ	50	37.00	70	1482	238.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P <sub>L</sub> [W]	Relative losses P <sub>L</sub> /P <sub>N</sub> [%]	Voltage [V]
P1 (90/100)	2379	6.43	362
P2 (50/100)	1888	5.1	205
P3 (25/100)	1618	4.37	108
P4 (90/50)	1173	3.17	354
P5 (50/50)	832	2.25	199
P6 (50/25)	572	1.55	197
P7 (25/25)	389	1.05	100

Map of losses - relative losses P<sub>L</sub>/P<sub>N</sub> [%]

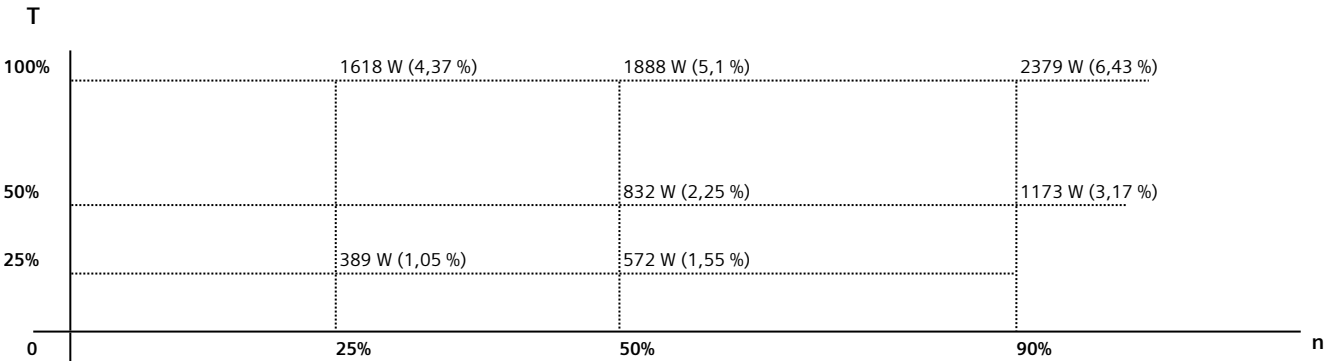


Notes:

T as relative T:  $T/T_N$  [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n:  $n/n_N$  [%]

Responsible department	Technical reference	Created by	Approved by					
IN LVM								
	Document type				Document status			
	Datasheet				Released			
	Document title				Document number			
	1TL0013-2BB03-3AA4-Z							
	W12				Revision	Creation date	Language	Page
© INNOMOTICS 2024					743	2024-10-31 06:54	en	1/1