

Efficiency documentation for 50/60Hz three-phase Squirrel-Cage-Motors


Motor type: 0CV3356C

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

General data ¹						
U _N [V]	D/Y	f _N [Hz]	P _N [kW]	I _N [A]	n _N [1/min]	T _N [Nm]
380	Δ	50	250.00	470	992	2407.0

Power losses acc. to COMMISSION REGULATION (EU) 2019/1781			
Operating point	Losses P _L [W]	Relative losses P _L /P _N [%]	Voltage [V]
P1 (90/100)	12496	5	361
P2 (50/100)	9720	3.89	203
P3 (25/100)	7471	2.99	105
P4 (90/50)	7025	2.81	356
P5 (50/50)	5248	2.1	199
P6 (50/25)	4160	1.66	197
P7 (25/25)	2409	0.96	100

Map of losses - relative losses P_L/P_N [%]

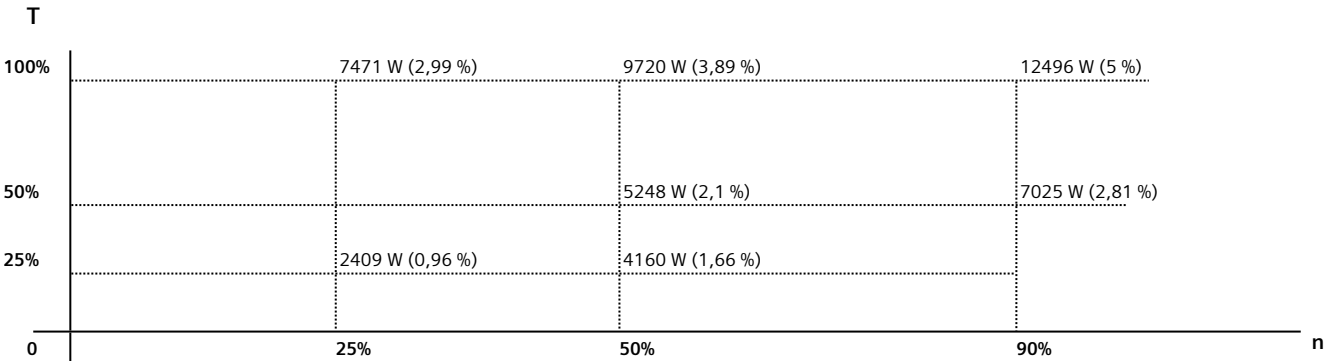


Notes:

T as relative T: T/T_N [%]

-1: at 40 degrees Celsius and 1000 meters

n as relative n: n/n_N [%]

Responsible department	Technical reference	Created by	Approved by		
IN LVM					
	Document type	Document status			
	Datasheet				
	Document title	Document number			
	1LT0013-3BC63-3AA4-Z				
	W12	Revision	Creation date	Language	Page
© INNOMOTICS 2024		743	2024-10-31 06:56	en	1/1