



1MT8004/1MT8005 隔爆型三相异步电动机  
1MT8004/1MT8005 series Flameproof Low Voltage  
Three-phase Asynchronous Motor

---

产品样本 Catalog  
2026. 02

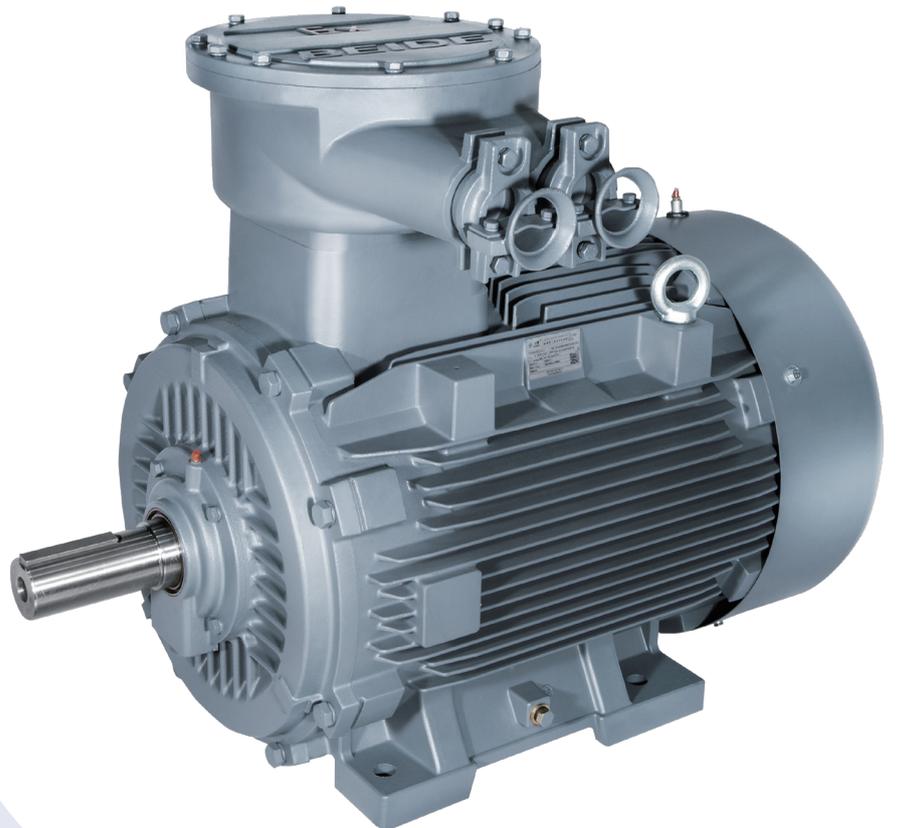

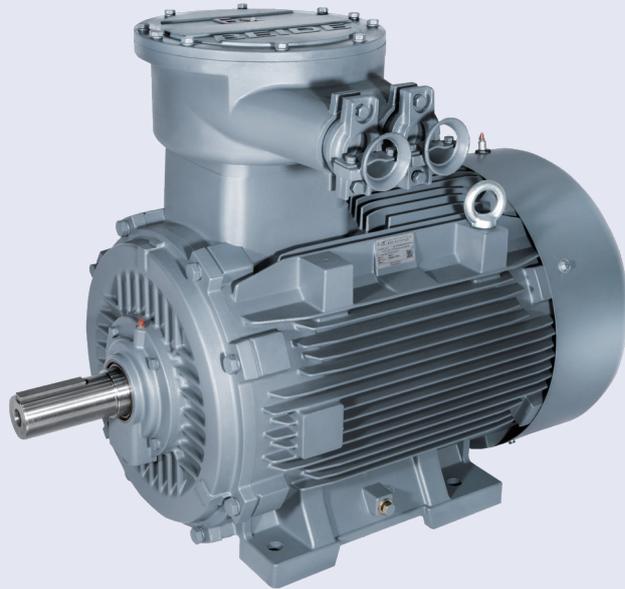

为更好应对气候变化，快速响应市场需求，聚焦提升能效与可靠性的创新，推动产业绿色低碳转型和可持续发展。2023年7月1日，西门子将其低压至高压电机、齿轮电机、中压变频器 and 电主轴领域等相关业务进行整合，成立了茵梦达（Innomotics GmbH）。茵梦达总部位于德国纽伦堡，业务遍及全球49个国家，拥有16家工厂，全球员工约15000名。

凭借百余年技术积淀和创新，茵梦达将专注于电机和大型传动专业领域。作为行业领军企业，茵梦达将不断推动工业化进程和可持续发展。

茵梦达在华拥有5家运营公司（包括一家区域总部和4家工厂），13家分公司和6家研发中心，其中在南京设立了“茵梦达低压电机事业部全球研发中心”，员工总数约3500人，是茵梦达在全球主要的研发和制造基地。



茵梦达电机（中国）有限公司原名西门子电机（中国）有限公司，于2006年3月1日正式运营，2024年5月正式更名。

从2018年荣获国家绿色工厂，到2019年被认定为国家高新技术企业，再到累计五次荣获西门子中国最佳运营工厂殊荣，茵梦达电机（中国）有限公司一直致力于为客户提供创新、高效、可持续的电机解决方案。

公司拥有员工约2000余人，占地面积18.2万平方米，年产电机约100万台，为茵梦达在华最大的低压、高效电机研发和生产基地。

# 目录 Contents

概览 Overview .....	5
产品概述 Product overview .....	9
机械特性 Mechanical design .....	12
电气特性 Electrical design .....	19
订货号和型号 Order No. and Motor type .....	20
选型技术数据表 Technical data table .....	21
选件 Options .....	25
外形尺寸 Dimension drawings .....	28
认证 Certificates .....	35

# 概览 Overview

在许多工业和公共部门，爆炸危险一直存在，例如在化学工业、炼油厂、钻井平台、加油站、饲料制造和污水处理厂。当爆炸性的气体、烟雾、雾气或尘埃与空气中的氧气以一定的易爆比例混合时，如果有接近于能够释放所谓最小点火能量的着火源，会存在爆炸的风险。

为了保证在这些地区的安全性，大多数国家的立法者都根据国家和国际的标准，以法律和法规的形式制定和实施了适当的规定。防爆设备的设计可以使正确使用这些设备时避免爆炸。

防爆设备可以根据不同类型的保护来设计。

## 区域的分类

有爆炸风险的场所被划分为不同的区域。划分区域的标准取决于危险物质存在的时间以及发生危险的概率。各个区域分类的信息和规则遵循以下标准：

- GB 3836.14, IEC/EN 60079-10-1 适用于气体环境
- GB/T 3836.35, IEC/EN 60079-10-2 适用于粉尘环境

此外，在不同的爆炸分组和温度等级之间进行了分类，这些都包含在危险等级评估中。

In many industrial and public industries, explosion hazards are ever-present, e.g. the chemicals industry, refineries, on drilling platforms, gas stations, feed manufacturing and sewage treatment plants. The risk of explosion is always present when gases, fumes, mist or dust are mixed with oxygen in the air in an explosive ratio close to sources of ignition that are able to release the so-called minimum ignition energy.


To ensure safety in these areas, legislators in most countries have implemented appropriate stipulations in the form of laws and regulations based on national and international standards. Explosion-protected equipment is designed such that an explosion can be prevented when it is used properly.

## Classification of zones

Areas subject to explosion hazard are divided into zones. Zoning is based on the presence time of explosive substances and probability of explosion. Information and specifications for classification of the zones are laid down in the following standards:

- GB 3836.14, IEC/EN 60079-10-1 for gas atmospheres
- GB/T 3836.35, IEC/EN 60079-10-2 for dust atmospheres

Furthermore, a distinction is made between various explosion groups as well as temperature classes and these are included in the hazard assessment.

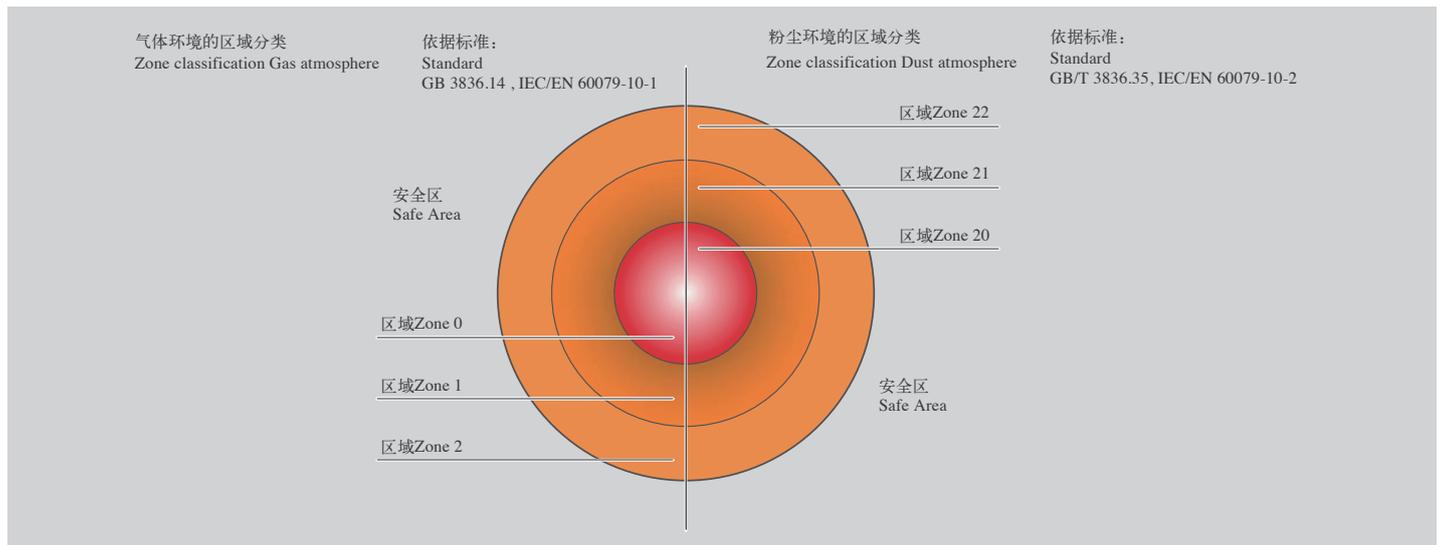

根据各区域的分类和存在的危险，所使用的设备必须满足最低防护要求。设备必须在符合要求的工况下使用，以避免点燃外部的爆炸性环境。

Depending on the particular zone and therefore the associated hazard, operating equipment must comply with defined minimum requirements regarding the type of protection. The different types of protection require corresponding measures to prevent ignition that should be implemented at the motor in order to prevent a surrounding explosive atmosphere from being ignited.

区域 Zone		区域定义的标准: Zone definition acc. to GB 3836.14 & IEC/EN 60079-10-1 用于气体环境 for gas atmospheres GB/T 3836.35 & IEC/EN 60079-10-2 用于粉尘环境 for dust atmospheres	分配 保护类型 Assigned types of protection	分类根据 Category according to 2014/34/EU	设备保护等级根据 Equipment protection level acc. to GB/T 3836.1 & IEC/EN 60079-0
气体 Gas 1) 2)	粉尘 Dust 1) 2)				
0	–	持续、长时间或频繁存在爆炸性气体环境的区域 An area in which there is an explosive gas atmosphere constantly, over a long period or frequently.	不允许低压电机使用 Low-voltage motors not permitted	1	Ga
1	–	在正常运行过程中，预计偶尔会出现爆炸性气体环境的区域 An area in which it is expected that an explosive gas atmosphere will occur occasionally during normal operation.	Ex eb, Ex db eb, Ex db	2	Gb
2	–	在正常运行过程中，预计很少或只短暂出现爆炸性气体环境的区域 An area in which it is expected that an explosive gas atmosphere will occur only rarely and then only briefly during normal operation.	Ex ec	3	Gc
–	20	持续、长时间或频繁存在由粉尘-空气混合物组成的爆炸性气体环境的区域 An area in which there is an explosive gas atmosphere comprising a dust-air mixture constantly, over a long period or frequently.	不允许低压电机使用 Low-voltage motors not permitted	1	Da
–	21	在正常运行的过程中，预计会偶尔存在由粉尘-空气混合物组成的爆炸性气体环境的区域 An area in which it is expected that an explosive gas atmosphere comprising a dust-air mixture will occur occasionally during normal operation.	Ex tb	2	Db
–	22	在正常运行的过程中，预计很少或只短暂在空气中形成一团易燃尘埃的爆炸性气体环境的区域 An area in which it is expected that an explosive gas atmosphere in the form of a cloud of flammable dust in air will occur only rarely and then only briefly during normal operation.	Ex tc <sup>3)</sup>	3	Dc

<sup>1)</sup> 电机用于

- 区域 1 也可以用于区域 2.
- 区域 21 也可以用于区域 22.

<sup>2)</sup> 若电机仅有气体防爆认证或粉尘防爆认证，不允许在混合环境中使用。混合环境：爆炸性的气体和粉尘同时在大气环境中存在。

<sup>3)</sup> Ex tc 电机不允许在含有导电粉尘的环境中运行。

<sup>1)</sup> Motors of

- Zone 1 can also be used in Zone 2.
- Zone 21 can also be used in Zone 22.

<sup>2)</sup> Motors which are certified for gas or dust protection must not be used in hybrid mixtures! Hybrid mixtures: when explosive gas and dust atmospheres occur simultaneously.

<sup>3)</sup> Ex tc motors are not approved for operation in environments containing conductive dust.

## 应用

以下情况常常需要选用防爆电机，以防止爆炸对人造成严重伤害和对财产造成严重损失。

- 化工和石化行业
- 矿物油和天然气生产
- 煤气产业
- 煤气供应公司
- 加油站
- 焦化厂
- 磨粉厂 (例如: 玉米, 固体)
- 污水处理厂
- 木材加工(例如: 木屑, 树脂)
- 其他易受爆炸危害的行业

## Application

The explosion-proof motors are often used in the following industries to prevent explosion hazards that result in serious injury to persons and severe damage to property.

- Chemical and petrochemical industry
- Production of mineral oil and gas
- Gas works
- Gas supply companies
- Petrol stations
- Coking plants
- Mills (e.g. corn, solids)
- Sewage treatment plants
- Wood processing (e.g. sawdust, tree resin)
- Other industries subject to explosion hazards

## 气体和蒸汽的隔爆等级 Flameproof class of gases and vapors

使用场所 Location	标准代号 Code of standard GB/T 3836.1 / GB/T 3836.2 / IEC60079-0 / IEC60079-1 隔爆等级 Flameproof class
矿用 For Mines	d I
除煤矿以外的爆炸性气体环境 Explosive gas environment except mines	d II A
	d II B
	d II C

## 按爆炸性混合物的自然温度 (°C ) 分组 Temperature classes

电子设备的温度等级 Temperature class of electrical equipment	电子设备的最大表面温度 Maximum surface temperature of electrical equipment	气体或蒸汽的点燃温度 Ignition temperature of gases or vapors
T1	450°C	> 450°C
T2	300°C	> 300°C
T3	200°C	> 200°C
T4	135°C	> 135°C
T5	100°C	> 100°C
T6	85°C	> 85°C

## 根据爆炸组别和温度等级对气体和蒸汽分类

### Classification of gases and vapors into explosion groups and temperature classes

爆炸性 气体分组 explosion group	按爆炸性混合物的自然温度 (°C) 分组 Temperature classes					
	T1 (450)	T2 (300)	T3 (200)	T4 (135)	T5 (100)	T6 (85)
	材料名称 Material designation	材料名称 Material designation	材料名称 Material designation	材料名称 Material designation	材料名称 Material designation	材料名称 Material designation
IIA (MESG≥0.9mm)	丙酮 Acetone	醋酸戊酯 i-amyl acetate	汽油 Benzine	乙醛 Acetaldehyde		
	乙烷 Ethane	正丁烷 n-butane	汽油 Gasoline			
	乙酸乙酯 Ethyl acetate	正丁醇 n-butyl alcohol	特殊汽油 Special benzine			
	氯乙烷 Ethyl chloride	环己酮 Cyclohexanone	柴油燃料 Diesel fuel			
	氨 Ammonia	二氯乙烷 1,2-dichloroethane	民用燃油 Heating oils			
	苯 Benzene	乙酸酐 / 醋酸酐 Acetic acid anhydride	n-正己烷 n-hexane			
	醋酸 Acetic acid					
	一氧化碳 Carbon monoxide					
	甲烷 Methane					
	甲醇 Methanol					
	氯甲烷 Methyl chloride					
	萘 Naphthalene					
	苯酚 Phenol					
	丙烷 Propane					
甲苯 Toluene						
IIB (0.5mm<MESG <0.9mm)	城市煤气 (照明气) Town gas (illuminating gas)	乙醇 Ethyl alcohol	硫化氢 Hydrogen sulfide	乙基醚 Ethyl ether		
		乙烯 Ethylene				
		环氧乙烷 Ethylene oxide				
IIC (MESG≤0.5mm)	氢 Hydrogen	乙炔 Acetylene				二硫化碳 Carbon disulfide


MESG, GB/T 3836.11和IEC 60079-20-1中规定的最大试验安全间隙, 是指在规定的条件下, 壳内所有浓度的被试验气体或蒸气与空气的混合物点燃后, 通过25 mm长的接合面均不能点燃壳外爆炸性气体混合物的外壳空腔两部分之间的最大间隙。

MESG值越小, 意味着设备的防爆等级越高, 对设备的要求越严苛。当设备可以满足在IIC气体组别下运行时, 同时也满足IIA和IIB的要求。

MESG, maximum experimental safe gap (for an explosive mixture). It's maximum gap of a joint of 25 mm in width which prevents any transmission of an explosion during 10 tests made under the conditions specified in GB/T 3836.11 and IEC 60079-20-1.

The smaller the MESG value, the higher the explosion-proof level of the equipment, and the more stringent requirements for the equipment. If the equipment can run under the IIC gas group, it also meets the requirements of IIA and IIB.

# 产品概述 Product overview

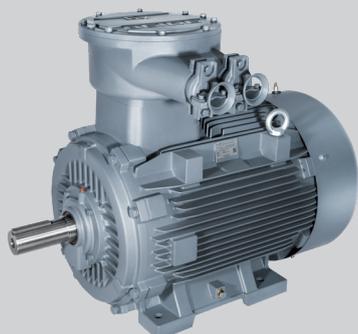

额定功率：0.55 ~ 315 kW

机座号：80 ~ 355

电压与频率：380/660V 50Hz，其他常用电压可选

标准颜色：RAL7011

冷却方式：IC411

防爆标志：Ex db IIB T4 Gb

防护等级：IP55

绝缘系统：F级

注油装置：机座号160 ~ 355的电机标配

环境温度：-20°C ~ +40°C标配设计

Rated output: 0.55 ~ 315 kW

Frame size: 80 ~ 355

Voltage and Frequency: 380/660V 50Hz, Other common voltage can be provide as option design

Standard color: RAL7011

Cooling method: IC411

Frame-proof marking: Ex db IIB T4 Gb

Protect degree: IP55

Insulation class: F

Re-greasing device: FS 160 ~ 355 motor as standard

Ambient temperature: -20°C ~ 40°C as standard

1MT8004/1MT8005系列高效隔爆型全封闭、自扇冷三相异步电动机是一款全新产品。该系列防爆电机完全符合IEC 60079-0:2017 / IEC 60079-1:2017以及GB/T 3836.1-2021 / GB/T 3836.2-2021等设计标准，防爆等级为 Ex db IIB T4 Gb且防爆性能通过CQST认证。其效率达到IEC 60034-30 IE4/IE5高效等级要求(50Hz)，符合GB 18613-2020能效等级二级/一级。

具有性能优良，使用安全可靠，安装灵活，维护方便，振动小，噪音低等特点。

1MT8004/1MT8005系列高效隔爆型电动机可广泛应用于石油、化工及油气等危险领域和场所。电机的设计使得电机内部的爆炸不会波及外界环境，内部由爆炸产生的能量在被称作“隔爆腔”的空间内消散，使得这些能量不足以点燃外部的爆炸性环境。

1MT8004/1MT8005 series flameproof motors is newly designed totally enclosed fan cooling (TEFC) high efficiency motor. This series flameproof motor completely meet the standard of IEC 60079-0:2017/IEC 60079-1:2017 and GB/T 3836.1-2021/GB/T 3836.2-2021. The type of protection for this motor is Ex db IIB T4 Gb. And its efficiency fulfill efficiency grade IE4/IE5 (50Hz) of IEC 60034-30, and also Grade 2/Grade 1 efficiency of GB 18613-2020.

This series products have excellent performance, safe and reliable to use, simple and flexible installation, easy to maintain, low vibration, low noise.

1MT8004/1MT8005 series high-efficiency flameproof motors can be widely used in petroleum, chemical industry, oil and gas and other hazardous areas and places. These motors are designed such that an explosion within the housing cannot result in an explosion in the environment. The energy that is generated internally by an explosion is dissipated in the so-called "flameproof enclosure" so far that the energy is no longer sufficient for ignition outside the casing.

## 噪声

### 噪声值

噪声值根据 DIN EN ISO 1680 标准在噪音室测得。表面声压级噪声 $L_{pfa}$  计算表示单位为 dB (A)。声压级噪声的空间平均值是在其测量面上测得的。测量面是距离电机1米的测量包围面。声功率级噪声用  $L_{WA}$  来表示，单位为 dB (A)。噪音值见选型数据表，选型数据表中的噪声值仅适用于全封闭自扇冷却（冷却方式：IC411）。电动机在 50 Hz 电源供电空载运行时，噪音容差为 +3 dB。当在 60 Hz 电源下空载运行时，噪音容差大约为 +4 dB。

## 振动

所有电动机转子都使用半键按照 A 级（标准）振动等级进行动态平衡。电动机在空载时测得振动速度有效值不超过下表中的 A 级所列值。电机还可工程订制B级振动等级设计。

## Noise levels

### Noise levels for mains-fed operation

The noise levels are measured in accordance with DIN EN ISO 1680 in a anechoic room. It is specified as the A-valued measuring-surface sound pressure level  $L_{pfa}$  in dB (A). This is the spatial mean value of the sound pressure levels measured on the measuring surface. The measuring surface is a cube 1 m away from the motor surface. The sound power level is also specified as  $L_{WA}$  in dB (A). Please find the noise value in technical data table, the specified values are only valid for totally enclosed fan cooling (cooling method: IC411) motor with no load at 50 Hz with no load, and the tolerance is +3 dB. While motor operating 60 Hz with no load, the values are approximately +4 dB (A) higher.

## Vibration

1MT8004/1MT8005 rotors are dynamically balanced to severity grade A using a half key. Table below contains the effective vibration values for unloaded motors. Vibration grade B can be provided as engineering solution.

振动等级 Vibration Grade	机座号 Frame size (mm)	56 ≤ FS ≤ 132		H>132	
	安装方式 Mounting	位移 Vibration displacement/ $\mu$ m	速度 Vibration velocity/(mm/s)	位移 Vibration displacement/ $\mu$ m	速度 Vibration velocity/(mm/s)
A	自由悬置 Free suspension	45	2.8	45	2.8
	刚性安装 Rigid mounting	-	-	37	2.3 2.8 <sup>1)</sup>
B	自由悬置 Free suspension	18	1.1	29	1.8
	刚性安装 Rigid mounting	-	-	24	1.5 1.8 <sup>1)</sup>

注：

<sup>1)</sup> 该值为GB/T 10068-2020 中定义的轴中心高H>132mm的两极电机，当两倍电网频率占主导时的振动速度限值。

Note:

<sup>1)</sup> The level are vibration velocity limit when the twice line frequency vibration level is dominant defined by GB/T 10068-2020, for 2p motors that frame size bigger than 132mm.

## 防爆标志 Ex-Mark

	Ex	db <sup>1)</sup>	IIB	T4	Gb
防爆标识 Marking for prevention of explosions					
防爆类型 Protection type db = 由隔爆外壳保护的 设备 db = Protection by flameproof enclosures					
电气设备类别 (II类B) Equipment group (IIB)					
II类电气设备最高表面温度 Maximum allowable surface temperature for Group II electrical equipment T4 = 135°C					
设备保护级别 Protection level Gb = “高”的保护级别 Gb = "high" level of protection					

注:

<sup>1)</sup> 最新标准IEC60079-0:2017和GB/T 3836.1-2021中防爆类型标识为db。

Note:

<sup>1)</sup> Protection type is db in IEC60079-0:2017 and GB/T 3836.1-2021.

## 铭牌样例 Nameplate example

 贝得® BEIDE		FLAMEPROOF THREE-PHASE ASYNCHRONOUS MOTOR				Ex		 GB18613-2020	
隔爆型三相异步电动机		Eff.-Grade2		GB18613-2020					
型号 1MT8004-3AB2	3-3JA4-Z	315M	LMH-2411/800003888993/001	Q/321081 KJA020-2024					
132 kW	50 Hz	240/139 A	EFF. 96.4 %	1115 kg	Th.Cl.155(F)	Ex db II B T4 Gb			
380VΔ / 660VY	IM B35	1490 r/min	COSφ 0.86	IP 55	CNEx24.0139				
驱动端: 6319 C3		非驱动端: 6319 C3							
润滑脂: 2# Li Grease		油脂量: 驱动端40g / 非驱动端40g							
润滑周期: 4000h									
茵梦达电机(中国)有限公司 Innomotics Standard Motors Ltd.						二维码含说明书信息			

 贝得® BEIDE		FLAMEPROOF THREE-PHASE ASYNCHRONOUS MOTOR				Ex		 GB18613-2020	
隔爆型三相异步电动机		Eff.-Grade1		GB18613-2020					
型号 1MT8005-3AB2	3-3JA4-Z	315M	LMH-2411/800003888993/001	Q/321081 KJA021-2025					
132 kW	50 Hz	240/138 A	EFF. 97.1 %	1530 kg	Th.Cl.155(F)	Ex db II B T4 Gb			
380VΔ / 660VY	IM B35	1492 r/min	COSφ 0.86	IP 55	CNEx25.1556X				
驱动端: 6319 C3		非驱动端: 6319 C3							
润滑脂: 2# Li Grease		油脂量: 驱动端40g / 非驱动端40g							
润滑周期: 4000h									
茵梦达电机(中国)有限公司 Innomotics Standard Motors Ltd.						二维码含说明书信息			

# 机械特性 Mechanical design

## 安装结构型式 Construction and mounting type

结构型式 Construction type	机座带底脚，端盖无法兰 With feet and without flange on the end-shield (DE)					
安装型式 Mounting type	IM B3 FS80~355	IM B6 FS80~160	IM B7 <sup>3)</sup> FS80~160	IM B8 FS80~160	IM V5 <sup>1)</sup> FS80~160	IM V6 <sup>2)</sup> FS80~160
示意图 Diagram						
电动机订货号第14位号 上对应的字母 Letter, position 14 <sup>th</sup> of Motor code	A	T	U	V	C	D

结构型式 Construction type	机座不带底脚，端盖有法兰 Without feet and with flange on the end-shield (DE)			机座带底脚，端盖有法兰 With feet and with flange on the end-shield (DE)	
安装型式 Mounting type	IM B5 FS80~280	IM V1 <sup>1)</sup> FS80~355	IM V3 <sup>2)</sup> FS80~160	IM B35 FS80~355	IM V15 <sup>1)</sup> FS80~160
示意图 Diagram					
电动机订货号第14位号 上对应的字母 Letter, position 14 <sup>th</sup> of Motor code	F	G	H	J	W

结构型式 Construction type	机座不带底脚，端盖有标准小法兰 Without feet and with C-flange on driven end-shield (DE)			机座带底脚，端盖有标准小法兰 With feet and with C-flange on driven end-shield (DE)
安装型式 Mounting type	IM B14 FS80~160	IM V18 <sup>1)</sup> FS80~160	IM V19 <sup>2)</sup> FS80~160	IM B34 FS80~160
示意图 Diagram				
电动机订货号第14位号 上对应的字母 Letter, position 14 <sup>th</sup> of Motor code	K	M	L	N

<sup>1)</sup> 标配防雨罩。

<sup>2)</sup> 当户外使用时，建议采取防护措施，以避免水直接喷射到电机轴上。

<sup>3)</sup> 当接线盒位于机座顶部时，进线口默认朝下。

<sup>1)</sup> Protection cover provided as standard.

<sup>2)</sup> When used outdoors, please take some protection measures to prevent water from spraying on the shaft.

<sup>3)</sup> When terminal box is on the top of the motor, the cable entry will be downwards.

## 轴承系统

1MT8004/1MT8005系列电动机标准配置深沟球轴承。FS160 ~ 355范围的电动机标准设计非驱动端轴承固定。FS80 ~ 132范围的电动机标准设计轴承浮动，可以选配驱动端轴承固定，选件号 L20。

当电动机轴端承受的悬臂力较大时，可以考虑选择增强悬臂力的轴承设计（选件号：L22）。

FS80 ~ 132 范围电动机标配不带再润滑装置。FS160~355 范围的电动机标配再润滑装置。

下表列出了标准配置下的轴承型号。

## Bearing Assignment

1MT8004/1MT8005 series motor are supplied with ball bearing as standard. Fixed bearing at NDE is as standard configuration for FS160 ~ 355 motors; For FS80 ~ 132 motors the bearings are floating, fixed bearing at DE can be ordered with option code L20.

If higher cantilever force on the shaft required, the increased cantilever bearing design (Option code: L22) should be considered.

As standard, FS80 ~ 132 motors are without regreasing device. FS160~355 motors with regreasing bearing and regreasing device is configured as standard.

The following table lists the standard bearing configuration.

## 轴承选配 Bearing Assignment

机座号 Frame size	极数 Number of poles	标准配置 Standard design		选项配置 Optional design	
		水平/竖直安装 Horizontal / Vertical mounting		增强悬臂力的设计（选项代码L22） Increased cantilever force (option code L22)	
		驱动端轴承 DE bearing	非驱动端轴承 NDE bearing	驱动端轴承 DE bearing	非驱动端轴承 NDE bearing
80	2~6	6204 2RZ C3	6204 2RZ C3	-	-
90	2~6	6205 2RZ C3	6205 2RZ C3	-	-
100	2~6	6306 2RZ C3	6306 2RZ C3	-	-
112	2~6	6306 2RZ C3	6306 2RZ C3	-	-
132	2~8	6308 2RZ C3	6308 2RZ C3	-	-
160	2~8	6309 C3	6309 C3	NU309	6309 C3
180	2~8	6310 C3	6310 C3	NU310	6310 C3
200	2~8	6312 C3	6312 C3	NU312	6312 C3
225	2~8	6313 C3	6313 C3	NU313	6313 C3
250	2~8	6315 C3	6315 C3	NU315	6315 C3
280	2	6315 C3	6315 C3	NU315	6315 C3
	4~8	6316 C3	6316 C3	NU316	6316 C3
315	2	6316 C3	6316 C3	NU316	6316 C3
	4~8	6319 C3	6319 C3	NU319	6319 C3
355	2	6317 C3	6317 C3	NU317	6317 C3
	4~8	6320 C3	6320 C3	NU320	6320 C3

## 润滑脂寿命和再润滑周期

对于不可再润滑的轴承，其润滑脂寿命与轴承寿命相当。

## Grease life and re-greasing interval

For permanent lubrication, the bearing grease lifetime is matched to the bearing lifetime.

## 润滑脂寿命和再润滑周期（电动机水平安装）

## Grease lifetime and re-grease interval (Horizontal installation)

使用持久润滑型轴承时 Using permanent lubrication bearing		
机座号 Frame size	极数 Poles	润滑脂寿命 Grease lifetime up to CT 40°C <sup>1)</sup>
80 ~ 132	2-8	20000 或 (or) 40000 <sup>2)</sup>

<sup>1)</sup> 标准的最高环境温度为40°C，对于持久润滑型轴承，环境温度每升高10°C，润滑脂寿命缩短一半。

<sup>2)</sup> 40000小时适用于电动机水平安装，且轴不受额外轴向力的工作情况。

<sup>1)</sup> Maximum ambient temperature is 40°C under standard conditions. For permanent lubrication bearings, grease lifetime will be halved for each 10K ambient temperature rising.

<sup>2)</sup> The 40000h grease lifetime is suited for horizontal mounting motors without additional axial force.

使用可再润滑型轴承时 Using re-greasable bearing			
机座号 Frame size	极数 Poles	轴承 Bearing	标准环境温度下的润滑周期（小时） Interval under standard ambient temperature(h)
160	2P	6309 C3	4000
	4~8P	NU309	8000
180	2P	6310 C3	4000
	4~8P	NU310	8000
200	2P	6312 C3	4000
	4~8P	NU312	8000
225	2P	6313 C3	4000
	4~8P	NU313	8000
250	2P	6315 C3	4000
	4~8P	NU315	8000
280	2P	6315 C3	4000
	4~8P	6316 C3 NU 316	5000
315	2P	6316 C3 NU316	3000
	4P	6319 C3	4000
	6~8P	NU319	6000
355	2P	6317 C3 NU317	3000
	4P	6320 C4	4000
	6~8P	NU320	6000

当电动机在非正常的条件下运行时，轴承的寿命会缩短。如下面几种情况：

- 当电动机的运行速度高于额定速度时，由于电动机的振动增大，使得轴承受到额外的径向力和轴向力，导致其寿命减少；
- 当环境或设备等因素引起电动机振动加大时，同样轴承也会因此受到额外的径向力和轴向力，而导致其寿命减少；

When the motor runs outside of normal conditions, the bearing life will be reduced, such as the following conditions.

- When motor runs beyond the rated speed, the increase of motor vibration will result in the extra radial and axial force on bearing. This will reduce the life of bearing;
- When the motor vibration increase due to the environment or other equipment, the bearing also will endure more radial and axial force. This also will reduce the life of bearing;

## 接线盒

接线盒标准位置位于机座顶端，且自身可 $4 \times 90^\circ$ 旋转，从而使电缆可以从各个方向进入。当选择进线口朝向电机驱动端时，须留意电机安装环境前方是否留有足够空间供电缆走线。标准接线盒使用喇叭口型进线斗，机座号80~225的电机有一个进线斗，机座号250~355的电机有两个进线斗。

## Connection box

The connection box is located on the top of motor housing as standard, and can be rotated by  $4 \times 90^\circ$  to allow for cable entry from each direction. When selecting the entrance to the motor drive end, please notice whether there is enough space in front of the installation for the cable line. For the standard connection box with hoop gland, the motor of FS 80~225 has one hoop gland, and the motor of FS250~355 has two.




标准配置接线盒 Standard connection box



X97 接线盒 (可选) Connection box of option code X97



X98接线盒(可选) Connection box of option code X98

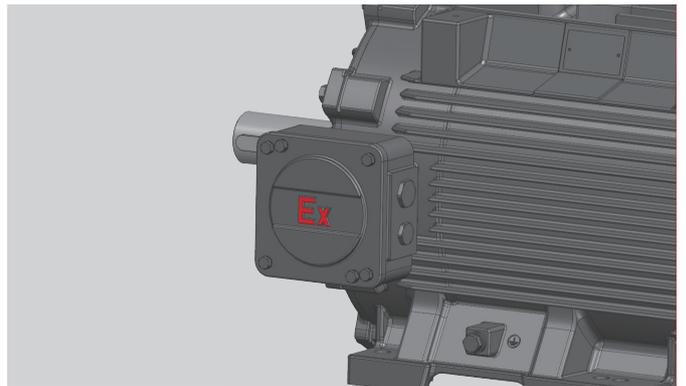

R57/R58接线盒 (可选) Connection box of option code R57/R58

标准接线盒 Standard main terminal box

机座号 Frame Size	主接线端子数 No. of main terminal	主接线端子螺纹 Main terminal thread	主进线孔数量 No. of main cable entry	密封圈直径 Hoop gland dia. (mm)	外接电缆直径 <sup>2)</sup> Cable diameter (mm)	最大辅助端子数 <sup>1)3)4)</sup> Max. auxiliary terminal
80	6	M5	1	1x φ 42	13~14 19~20 24~25	12
90						
100						
112						
132						
160	6	M6	1	1x φ 58	13~14 19~20 25~26 30~31 34~35	24
180						
200	6	M8	1	1x φ 72	19~20 25~26 31~32 37~38 41~42	24
225						
250	6	M10	2	2x φ 72	19~20 25~26 31~32 37~38 41~42	24
280						
315	6	M16	2	2x φ 90	30~31 35~36 44~45 49~50	24
355						

注:

- <sup>1)</sup> 每个辅助接线端子所能适配的电缆接头不超过 2.5 mm<sup>2</sup>。
- <sup>2)</sup> 请根据进线电缆直径可选尺寸选择电缆，并保证所选电缆允许的电缆直径处于此列数据范围内。
- <sup>3)</sup> 当同时选用测温元件和防潮加热带时会配备两个辅助进线孔。孔的螺纹尺寸是根据所需的辅助端子数量决定的。
- <sup>4)</sup> 辅助电缆进线孔尺寸请咨询茵梦达。

Notes:

- <sup>1)</sup> The adaptable diameter to each auxiliary terminal can not exceed 2.5mm<sup>2</sup>.
- <sup>2)</sup> Please choose the cable entry diameter according to the cable diameter can be selected column. And ensure the allowed cable entry diameter is within the range in this column.
- <sup>3)</sup> If both temperature sensor and heater are selected, 2 auxiliary cable entries will be configured. The dimensions of the cable entries will be configured according to the quantity of the terminals.
- <sup>4)</sup> For the size of the Auxiliary cable entry, please inquire INNOMOTICS.

选项-标准接线盒带钢管布线孔 (选项代码X97) Option-Standard terminal box with conduit entry (Option code X97)

机座号 Frame Size	钢管布线进线孔螺纹 Size of Main Conduit entry
80	M30 × 2
90	
100	
112	
132	
160	M36 × 2
180	
200	M48 × 2
225	
250	2 × M48 × 2
280	
315	2 × M64 × 2
355	

选项 - 配备闷盖的接线盒 (选项代码 X98) Option - Main terminal box with plug (option code X98)

机座号 Frame Size	主接线端子数 No. of main terminal	主接线端子螺纹 Main terminal thread	主进线孔螺纹规格 Main cable entry	最大辅助端子数 <sup>1)</sup> Max. auxiliary terminal
80	6	M5	M16x1.5+M20x1.5	12
90				
100	6	M5	2xM32x1.5	12
112				
132				
160	6	M6	2xM40x1.5	24
180				
200	6	M8	2xM50x1.5	24
225				
250	6	M10	2xM63x1.5	24
280				
315	6	M16	2xM72x2	24
355	6			

## 选项 - 带辅助接线盒 (选项代码 R57/R58) <sup>2) 3)</sup>

Option - auxiliary terminal box (option code R57/R58)

机座号 Frame Size	接线端子数 No. of terminals	电缆进线孔 Cable entry
160~355	1~4	1xM16x1.5
	5~9	1xM20x1.5
	10~18	1xM25x1.5
	19~27	1xM25x1.5+1xM20x1.5
	28~36	1xM25x1.5+1xM25x1.5

注:

- <sup>1)</sup> 每个辅助接线端子所能适配的电缆接头不超过 2.5 mm<sup>2</sup>。
- <sup>2)</sup> 选用一个辅助接线盒时, 测温元件可接入辅助接线盒中, 防潮加热带默认接入主接线盒中。若需将防潮加热带接入辅助接线盒中, 请咨询茵梦达。
- <sup>3)</sup> FS315/FS355 可选双辅助接线盒, 其中一个辅助接线盒用来接防潮加热带, 另一个用来接测温元件。选项代码R58。

Notes:

- <sup>1)</sup> The adaptable diameter to each auxiliary terminal can not exceed 2.5mm<sup>2</sup>.
- <sup>2)</sup> When select R57 and Q02/Q04 and winding thermal protections, the terminals of winding thermal protections will be put into the auxiliary terminal box, and the terminals of Q02/Q04 will be still put into main terminal box. If Q02/Q04 is requested to put into the auxiliary terminal box, please inquire INNOMOTICS.
- <sup>3)</sup> For FS315 & FS355, 2 terminal boxes can be One for Q02/Q04, the other for thermal protectors. optional, option code R58.

## 电动机保护

### 防潮加热保护

当电动机处于较为恶劣的环境时, 比如湿度非常大或者昼夜温差比较大, 电动机的绕组很可能出现凝露的现象, 这样会带来电动机烧毁的风险。对于这种情况, 建议对电动机绕组配置防潮加热带 (选件号: Q04) 进行保护。

电动机防潮加热带必须在电动机工作过程中处于不工作状态; 当电动机停机时, 防潮加热带必须启动工作, 为绕组加热。

防潮加热带的电气参数如下表所示。

## Motor protection

### Anti-condensation heater

Motors whose windings are at risk of condensation due to the climatic conditions, e.g. inactive motors in humid atmospheres or motors that are subjected to widely fluctuating temperatures can be equipped with anti-condensation heaters (Option code: Q04).

Anti-condensation heaters must be switched off during operation. When motor shut down, the heaters must be switched on.

The electrical parameters of anti-condensation heaters are shown in the following table.

## 防潮加热带电气参数 Electrical data of Anti-condensation heater

机座号 Frame size	功率和电压 Power (W) & voltage (V)
	Q04
80 ~ 90	20 W / 220 V
100 ~ 112	30 W / 220 V
132 ~ 160	40 W / 220 V
180 ~ 200	50 W / 220 V
225 ~ 280	60 W / 220 V
315	80 W / 220 V
355	100 W / 220 V

### 电动机过热保护

电动机热保护是指将温度保护传感器或温度检测传感器嵌入电动机定子绕组或其他适当的地方，从而使其不会因为过热而受到破坏。

不同的电动机热保护方式可以在电动机订货号的第 15 位采用不同的字母或者选件号来表示。

### Motor thermal overload protection

Motor thermal protection means to use of thermal protectors and thermal detectors incorporated into the stator windings or placed in other suitable positions in motor in order to protect them against serious damage due to thermal overloads.

The order variants for motor protection are coded with letters in the 15th position of the Motor Order No., or ordered with Option code.

# 电气特性 Electrical design

## 额定输出

1MT8004/1MT8005 电动机的额定功率是指电动机在连续运行的情况下 S1 (IEC 60034-1)，此时周围环境温度为 -20 °C ~ 40 °C，海拔高度不超过 1000 m。

## 电压、频率

IEC 60034-1 将电压和频率的偏差分为 A 类 (电压偏差  $\pm 5\%$ ，频率偏差  $\pm 2\%$ ) 和 B 类 (电压偏差  $\pm 10\%$ ，频率偏差  $+3\% / -5\%$ )。电动机均能够在 A 类和 B 类提供额定转矩。在 A 类中，温度比正常运行下温度大约提升 10 K。

## Rated Output

1MT8004/1MT8005 motors rated output powers means that the motor runs under continuous duty S1 (IEC 60034 - 1) operation when operated at ambient temperature from -20 °C to 40 °C and at altitudes of up to 1000 m over sea.

## Voltage and Frequency

IEC 60034-1 differentiates between Category A (combination of voltage deviation  $\pm 5\%$  and frequency deviation  $\pm 2\%$ ) and Category B (combination of voltage deviation  $\pm 10\%$  and frequency deviation  $+3\% / -5\%$ ) for voltage and frequency fluctuations. The motors can supply their rated torque in both Category A and B. In Category A, the temperature rise is approximately 10 K higher than during normal operation.

标准 Standard 60034 - 1	类别 Category A	类别 Category B
电压偏差 Voltage deviation	$\pm 5\%$	$\pm 10\%$
频率偏差 Frequency deviation	$\pm 2\%$	$+3\% / -5\%$

根据标准，不推荐电动机在 B 类情况下长时间运行  
According to the standard, longer operation is not recommended for Category B.

## 电气数据公差

- 效率  $\eta$   
-  $0.15 \times (1 - \eta)$   
效率  $\eta$  为小于 1 的值
- 功率因数:  $(1 - \cos \phi) / 6$   
最小绝对值: 0.02  
最大绝对值: 0.07
- 转差率:  $\pm 20\%$  (电动机的偏差  $< 1 \text{ kW} \pm 30\%$  时是允许的)
- 堵转电流:  $+20\%$
- 堵转转矩:  $-15\% \sim +25\%$
- 最大转矩:  $-10\%$
- 转动惯量:  $\pm 10\%$

## 过载倍数

根据 IEC60034 标准要求，1MT8004/1MT8005 系列电动机能够在额定电压和频率下承受 1.5 倍的额定电流达 2 分钟。

## Tolerance for electrical data

- Efficiency  $\eta$   
-  $0.15 \times (1 - \eta)$   
With  $\eta$  being a decimal number
- Power factor -  $(1 - \cos \phi) / 6$   
Minimum absolute value: 0.02  
Maximum absolute value: 0.07
- Slip  $\pm 20\%$  (for motors  $< 1 \text{ kW} \pm 30\%$  is admissible)
- Locked-rotor current  $+20\%$
- Locked-rotor torque  $-15\%$  to  $+25\%$
- Breakdown torque  $-10\%$
- Moment of inertia  $\pm 10\%$

## Overload times

According to IEC60034, 1MT8004/1MT8005 series motors are designed to withstand overload capacity of 1.5 times rated current for 2 minutes at rated voltage and frequency.

# 订货号和电机型号 Order No. and Motor Type

订货号 Order No.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	M	T	8	0	0	4	1	E	A	2	3	3	A	A	4

电机系列 Motor family

1MT800系列隔爆型三相异步电动机  
1MT800 series explosion protected three-phase asynchronous motors

效率 Efficiency

4 = 中国能效等级 2 级, IE4 效率等级  
4 = China energy efficiency grade 2, IE4 efficiency  
5 = 中国能效等级 1 级, IE5 效率等级  
5 = China energy efficiency grade 1, IE5 efficiency

机座号 Frame size

0D = 080 0E = 090  
1A = 100 1B = 112 1C = 132 1D = 160 1E = 180  
2A = 200 2B = 225 2C = 250 2D = 280  
3A = 315 3B = 355

极数 Pole

A = 2 B = 4 C = 6 D = 8

铁芯长度编号 Code of stator length

0, 1 = Short 2, 3 = Medium 4, 5, 6, 7 = Long

电压、连接方式和频率编号 Code of voltage, connections and frequency

2-2 = 50Hz 230V Δ/400VY                      3-4 = 50Hz 400V Δ/690VY  
2-1 = 50Hz 220V Δ/380VY                      0-1 = 50Hz 230V Δ  
3-3 = 50Hz 380V Δ/660VY                      2-3 = 50Hz 240V Δ/415VY  
3-5 = 50Hz 415V Δ  
9-0 = 特殊电压和频率 Special voltage & frequency <sup>1)</sup>

结构和安装方式编号 Code of construction and mounting type

A = IM B3    T = IM B6    U = IM B7    V = IM B8    D = IM V6    C = IM V5  
F = IM B5    G = IM V1    H = IM V3    J = IM B35    W = IM V15  
K = IM B14    M = IM V18    L = IM V19    N = IM B34

绕组保护编号 Code of winding protection

A = 无绕组保护 Without winding protection  
B = 一组三个PTC热敏电阻用于跳闸 3 PTC thermistors for tripping  
C = 两组三个PTC热敏电阻用于报警和跳闸 6 PTC thermistors for alarm and tripping  
H = 一组三个PT100温度传感器 3 PT100 resistance thermometers  
J = 两组三个PT100温度传感器 6 PT100 resistance thermometers

接线盒位置编号 (从驱动端看) Code of terminal box position (view from drive end)

4 = 顶出线 On top

附注:

<sup>1)</sup> 用电压编号 90 及相应选件号来定制其它电压 (参见选项描述);

Foot note:

<sup>1)</sup> Order other voltages with voltage code 90 and the corresponding Option code (see under "Option").

# 选型技术数据表 Technical data table

中国能效等级 2 级, IE4

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise Lp(A)	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
3000rpm 2 - pole															
220VD/380VY 50HZ															
80M	1MT8004-0DA22-1 □□□□	0.75	2885	83.5	83.3	0.83	1.64	2.5	7.9	2.6	3.1	0.0013	50	62	35
80M	1MT8004-0DA32-1 □□□□	1.1	2900	85.2	85.0	0.83	2.35	3.6	8.0	3.0	3.3	0.0016	50	62	37
90S	1MT8004-0EA02-1 □□□□	1.5	2910	86.5	86.2	0.85	3.10	4.9	9.7	3.2	3.2	0.0032	55	67	41
90L	1MT8004-0EA42-1 □□□□	2.2	2910	88.0	87.8	0.86	4.40	7.2	9.7	3.4	3.5	0.0069	55	67	48
100L	1MT8004-1AA42-1 □□□□	3	2925	89.1	90.0	0.87	5.9	9.8	8.5	2.8	3.3	0.0087	61	73	63
3000rpm 2 - pole															
380VD/660VY 50HZ															
112M	1MT8004-1BA23-3 □□□□	4	2940	90.0	90.7	0.88	7.7	13	8.5	2.7	3	0.0129	62	74	84
132S	1MT8004-1CA03-3 □□□□	5.5	2950	90.9	91.5	0.88	10.4	17.8	8.5	2.6	3.6	0.0242	66	78	104
132S	1MT8004-1CA13-3 □□□□	7.5	2950	91.7	92.3	0.89	14	24.3	8.5	2.8	3.8	0.0287	66	78	111
160M	1MT8004-1DA23-3 □□□□	11	2955	92.6	93.0	0.89	20.5	35.5	8	2.6	3	0.0619	66	79	181
160M	1MT8004-1DA33-3 □□□□	15	2960	93.3	93.6	0.89	27.5	48.4	8.5	2.8	3.5	0.0741	66	79	190
160L	1MT8004-1DA43-3 □□□□	18.5	2960	93.7	94.1	0.89	33.5	59.7	8.5	3	3.5	0.0852	66	79	208
180M	1MT8004-1EA23-3 □□□□	22	2972	94.0	94.1	0.89	40	70.7	8.5	2.6	3.4	0.183	67	80	270
200L	1MT8004-2AA43-3 □□□□	30	2970	94.5	94.6	0.89	54	96.5	8.5	2.6	3.1	0.268	71	84	366
200L	1MT8004-2AA53-3 □□□□	37	2972	94.8	94.8	0.89	67	119	8.5	2.6	3.1	0.283	71	84	375
225M	1MT8004-2BA23-3 □□□□	45	2979	95.0	94.9	0.89	81	144	8.5	2.8	3.2	0.563	72	85	445
250M	1MT8004-2CA23-3 □□□□	55	2982	95.3	95.3	0.89	99	176	8.5	2.8	3.0	0.82	72	86	595
280S	1MT8004-2DA03-3 □□□□	75	2978	95.6	95.6	0.9	132	241	8.5	2.8	3.2	0.899	75	89	710
280M	1MT8004-2DA23-3 □□□□	90	2978	95.8	95.9	0.9	159	289	8.5	2.7	3.6	1.01	75	89	740
315S	1MT8004-3AA03-3 □□□□	110	2982	96.0	95.9	0.89	196	352	8.5	2.1	2.4	2.09	77	92	1090
315M	1MT8004-3AA23-3 □□□□	132	2982	96.2	96.2	0.89	235	423	8.5	2.5	2.7	2.43	77	92	1150
315L	1MT8004-3AA53-3 □□□□	160	2982	96.3	96.4	0.89	285	512	8.5	2.5	2.6	2.81	77	92	1320
315L	1MT8004-3AA63-3 □□□□	185	2982	96.5	96.6	0.89	325	592	8.5	2.7	2.6	3.21	77	92	1400
315L	1MT8004-3AA73-3 □□□□	200	2975	96.5	96.8	0.89	355	642	7.5	2.3	2.2	3.21	77	92	1400
355M	1MT8004-3BA23-3 □□□□	220	2986	96.5	96.3	0.91	380	704	8.5	2.6	2.6	2.86	82	97	1590
355M	1MT8004-3BA33-3 □□□□	250	2982	96.5	96.4	0.91	435	801	8.5	2.4	2.4	2.86	82	97	1590
355L	1MT8004-3BA53-3 □□□□	280	2985	96.5	96.4	0.91	485	896	8.5	3	3.1	3.43	82	97	1740
355L	1MT8004-3BA63-3 □□□□	315	2982	96.5	96.4	0.91	550	1009	8.5	3.0	3.1	3.43	82	97	1750

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 2 级, IE4

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动 转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise LpFA	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
1500rpm 4 - pole															
220VD/380VY 50HZ															
80M	1MT8004-0DB22-1 □□□□	0.55	1445	83.9	83.5	0.74	1.35	3.6	7.0	2.4	2.8	0.0033	44	56	37
80M	1MT8004-0DB32-1 □□□□	0.75	1445	85.7	85.6	0.74	1.80	5.0	7.0	3.0	3.1	0.0040	44	56	39
90S	1MT8004-0EB02-1 □□□□	1.1	1450	87.2	86.5	0.75	2.55	7.2	8.2	3.0	3.8	0.0041	47	59	42
90L	1MT8004-0EB42-1 □□□□	1.5	1450	88.2	87.5	0.76	3.40	9.9	8.2	3.0	3.8	0.0068	47	59	49
100L	1MT8004-1AB42-1 □□□□	2.2	1470	89.5	89.6	0.79	4.75	14.3	8.5	2.4	3.8	0.0185	52	64	70
100L	1MT8004-1AB52-1 □□□□	3	1470	90.4	90.6	0.8	6.3	19.5	8.9	2.8	3.8	0.0201	52	64	73
1500rpm 4 - pole															
380VD/660VY 50HZ															
112M	1MT8004-1BB23-3 □□□□	4	1470	91.1	91.5	0.8	8.3	26	8.5	2.9	3.8	0.0245	53	65	88
132S	1MT8004-1CB03-3 □□□□	5.5	1475	91.9	92.4	0.8	11.4	35.6	8	2.6	3.2	0.0467	56	68	111
132M	1MT8004-1CB23-3 □□□□	7.5	1475	92.6	93.0	0.81	15.2	48.6	8	2.8	3.5	0.0593	56	68	127
160M	1MT8004-1DB23-3 □□□□	11	1482	93.3	93.6	0.82	22	70.9	8.5	3.2	3.3	0.142	58	71	193
160L	1MT8004-1DB43-3 □□□□	15	1482	93.9	94.2	0.82	29.5	96.7	8.5	2.9	3.5	0.159	58	71	214
180M	1MT8004-1EB23-3 □□□□	18.5	1480	94.2	94.6	0.82	36.5	119	7.9	2.6	3.2	0.264	61	74	282
180L	1MT8004-1EB43-3 □□□□	22	1480	94.5	94.8	0.82	43	142	8.5	2.8	3.6	0.281	61	74	292
200L	1MT8004-2AB53-3 □□□□	30	1486	94.9	95.4	0.82	59	193	8	2.8	3	0.508	61	74	366
225S	1MT8004-2BB03-3 □□□□	37	1486	95.2	95.6	0.85	69	238	8.5	2.6	3	0.789	63	76	429
225M	1MT8004-2BB23-3 □□□□	45	1488	95.4	95.7	0.85	84	289	8.5	2.8	3	0.937	63	76	487
250M	1MT8004-2CB23-3 □□□□	55	1488	95.7	96.0	0.86	102	353	8.5	2.5	3.3	1.44	62	76	630
280S	1MT8004-2DB03-3 □□□□	75	1488	96.0	96.3	0.87	136	481	8.5	2.8	3	1.91	66	80	775
280M	1MT8004-2DB23-3 □□□□	90	1488	96.1	96.5	0.88	162	578	8.5	2.8	3	2.15	66	80	820
315S	1MT8004-3AB03-3 □□□□	110	1491	96.3	96.5	0.86	200	705	8.5	2.8	2.5	3.38	69	84	1190
315M	1MT8004-3AB23-3 □□□□	132	1490	96.4	96.7	0.86	240	846	7.8	2.6	2.3	3.40	69	84	1220
315L	1MT8004-3AB53-3 □□□□	160	1490	96.6	96.9	0.87	290	1026	8.5	3.0	2.2	5.12	71	86	1430
315L	1MT8004-3AB63-3 □□□□	185	1490	96.7	97.0	0.87	335	1186	8.5	3.1	2.2	5.16	71	86	1500
315L	1MT8004-3AB73-3 □□□□	200	1490	96.7	97.0	0.87	360	1282	8.5	3.2	2.3	5.19	71	86	1540
355M	1MT8004-3BB23-3 □□□□	220	1490	96.7	96.9	0.88	395	1410	8.5	2.5	2.8	5.67	76	91	1780
355M	1MT8004-3BB33-3 □□□□	250	1490	96.7	96.9	0.88	445	1602	8.5	2.3	2.8	5.84	76	91	1810
355L	1MT8004-3BB53-3 □□□□	280	1490	96.7	96.9	0.88	500	1795	8.5	2.4	2.6	6.16	76	91	1910
355L	1MT8004-3BB63-3 □□□□	315	1490	96.7	97.0	0.88	560	2019	8.5	2.3	2.6	6.58	76	91	2000

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 2 级, IE4

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	启动 电流 Starting Current	启动 转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise LpFA	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
1000rpm 6 - pole															
220VD/380VY 50HZ															
80M	1MT8004-0DC32-1 □□□□	0.55	945	80.9	79.7	0.66	1.57	5.6	5.0	1.9	2.1	0.0050	43	55	40
90S	1MT8004-0EC02-1 □□□□	0.75	960	82.7	81.8	0.70	1.97	7.5	6.1	2.1	2.8	0.0053	45	57	43
90L	1MT8004-0EC42-1 □□□□	1.1	960	84.5	83.6	0.70	2.85	10.9	6.1	2.1	2.8	0.0087	45	57	50
100L	1MT8004-1AC42-1 □□□□	1.5	975	85.9	86.0	0.71	3.75	14.7	7.5	2.9	3.6	0.0185	49	61	70
112M	1MT8004-1BC22-1 □□□□	2.2	965	87.4	87.8	0.71	5.4	21.8	7.5	3.6	3.8	0.0238	51	63	84
132S	1MT8004-1CC02-1 □□□□	3	982	88.6	88.9	0.71	7.2	29.2	8	2.7	3.5	0.0481	55	67	104
1000rpm 6 - pole															
380VD/660VY 50HZ															
132M	1MT8004-1CC23-3 □□□□	4	984	89.5	89.6	0.72	9.4	38.8	8	2.8	4	0.0605	55	67	117
132M	1MT8004-1CC33-3 □□□□	5.5	982	90.5	90.9	0.72	12.8	53.5	8	3.1	4	0.0797	55	67	131
160M	1MT8004-1DC23-3 □□□□	7.5	984	91.3	91.6	0.76	16.4	72.8	7.5	3	3	0.151	56	69	186
160L	1MT8004-1DC43-3 □□□□	11	985	92.3	92.4	0.77	23.5	107	8	3.6	3.3	0.201	56	69	217
180L	1MT8004-1EC43-3 □□□□	15	986	92.9	93.4	0.8	30.5	145	7.6	2.7	3	0.318	57	70	270
200L	1MT8004-2AC43-3 □□□□	18.5	988	93.4	93.8	0.8	37.5	179	8	2.5	3	0.556	59	72	339
200L	1MT8004-2AC53-3 □□□□	22	988	93.7	94.2	0.81	44	213	8	2.8	3	0.639	59	72	360
225M	1MT8004-2BC23-3 □□□□	30	988	94.2	94.7	0.82	59	290	8	2.9	3	1.09	60	73	466
250M	1MT8004-2CC23-3 □□□□	37	988	94.5	95.1	0.83	72	358	8.0	2.5	3.0	1.64	55	69	605
280S	1MT8004-2DC03-3 □□□□	45	992	94.8	95.1	0.83	87	433	8	3.6	3.6	2.02	62	76	710
280M	1MT8004-2DC23-3 □□□□	55	991	95.1	95.5	0.84	105	530	8	3	3	2.25	62	76	725
315S	1MT8004-3AC03-3 □□□□	75	991	95.4	95.8	0.83	144	723	8	2.1	2.1	4.63	66	81	1110
315M	1MT8004-3AC23-3 □□□□	90	992	95.6	95.9	0.83	172	866	8	2.6	2.1	4.87	66	81	1170
315L	1MT8004-3AC53-3 □□□□	110	992	95.8	96.1	0.83	210	1059	8	2.8	2.3	5.90	66	81	1330
315L	1MT8004-3AC63-3 □□□□	132	992	96.0	96.2	0.82	255	1271	8	2.6	2.6	6.70	66	81	1390
355S	1MT8004-3BC23-3 □□□□	160	993	96.2	96.5	0.84	300	1539	8	2.5	2.5	10.57	75	90	1790
355M	1MT8004-3BC33-3 □□□□	185	993	96.3	96.6	0.84	345	1779	7.8	2.5	2.5	10.57	75	90	1790
355M	1MT8004-3BC43-3 □□□□	200	992	96.3	96.6	0.84	375	1925	7.7	2.4	2.5	11.17	75	90	1850
355L	1MT8004-3BC53-3 □□□□	220	994	96.4	96.6	0.84	415	2114	8	2.5	2.7	11.59	75	90	1920
355L	1MT8004-3BC63-3 □□□□	250	993	96.5	96.7	0.84	470	2404	8	2.9	2.9	13.05	75	90	2050

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 2 级, IE4

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动 转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise Lp(A)	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
750rpm 8-pole															
220VD/380VY 50HZ															
132S	1MT8004-1CD02-1 □□□□	2.2	725	84.5	85.1	0.7	5.7	29	6	2.2	2.8	0.0526	50	62	106
132M	1MT8004-1CD22-1 □□□□	3	725	85.9	86.3	0.7	7.6	39.5	6.5	2.6	3.2	0.0658	50	62	119
750rpm 8-pole															
380VD/660VY 50HZ															
160M	1MT8004-1DD23-3 □□□□	4	736	87.1	87.4	0.71	9.8	51.9	6.5	2.5	2.5	0.129	55	68	175
160M	1MT8004-1DD33-3 □□□□	5.5	736	88.3	88.6	0.72	13.1	71.4	6.5	2.5	2.6	0.150	55	68	186
160L	1MT8004-1DD43-3 □□□□	7.5	734	89.3	89.8	0.74	17.2	97.6	6.5	2.5	2.5	0.182	55	68	209
180L	1MT8004-1ED43-3 □□□□	11	734	90.4	91.1	0.74	25	143	6	2	2.5	0.360	57	70	285
200L	1MT8004-2AD53-3 □□□□	15	736	91.2	92.0	0.75	33.5	195	7	2.8	3.2	0.641	59	72	358
225S	1MT8004-2BD03-3 □□□□	18.5	738	91.7	92.4	0.76	40.5	239	7	2.6	3	0.73	59	72	377
225M	1MT8004-2BD23-3 □□□□	22	737	92.1	92.8	0.76	48	285	7	2.7	3	0.84	59	72	395
250M	1MT8004-2CD23-3 □□□□	30	739	92.7	93.3	0.77	64	388	7.0	2.7	2.8	1.27	61	75	545
280S	1MT8004-2DD03-3 □□□□	37	740	93.1	93.6	0.78	77	478	7	2.4	2.6	1.62	62	76	650
280M	1MT8004-2DD23-3 □□□□	45	740	93.4	94.1	0.8	92	581	7	2.5	2.6	1.99	62	76	690
315S	1MT8004-3AD03-3 □□□□	55	738	93.7	94.7	0.8	111	712	7.7	1.8	2	4.11	71	86	1060
315M	1MT8004-3AD23-3 □□□□	75	740	94.2	95.0	0.8	151	968	7.7	2.1	2.1	4.70	71	86	1120
315L	1MT8004-3AD53-3 □□□□	90	741	94.4	95.1	0.81	179	1160	7.7	2.2	2.2	6.41	71	86	1370
315L	1MT8004-3AD63-3 □□□□	110	742	94.7	95.2	0.81	220	1416	7.7	2.5	2.5	6.41	71	86	1370
355S	1MT8004-3BD23-3 □□□□	132	743	94.9	95.5	0.81	260	1697	7.7	2.2	2.2	9.74	73	88	1730
355M	1MT8004-3BD33-3 □□□□	160	743	95.1	95.7	0.82	310	2057	7.7	2.3	2.3	11.33	73	88	1860
355L	1MT8004-3BD53-3 □□□□	185	743	95.3	95.8	0.82	360	2378	7.7	2.3	2.3	11.95	73	88	1960
355L	1MT8004-3BD63-3 □□□□	200	744	95.4	95.9	0.82	390	2567	7.8	2.5	2.5	12.84	73	88	2030

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 1 级, IE5

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise Lp(A)	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
3000rpm 2 - pole															
220VD/380VY 50HZ															
80M	1MT8005-0DA22-1 □□□□	0.75	2885	86.3	87	0.83	1.59	2.5	8.7	4.2	4.4	0.0015	50	62	36
80M	1MT8005-0DA32-1 □□□□	1.1	2880	87.8	88.6	0.83	2.30	3.6	8.7	4.6	4.4	0.0018	50	62	38
90S	1MT8005-0EA02-1 □□□□	1.5	2905	88.9	90.2	0.85	3.00	4.9	9	3	4	0.0036	55	67	44
90L	1MT8005-0EA42-1 □□□□	2.2	2900	90.2	91.6	0.86	4.30	7.2	9	3.4	4	0.0090	55	67	51
100L	1MT8005-1AA42-1 □□□□	3	2930	91.1	91.9	0.87	5.8	9.8	9.5	3.3	3.5	0.0078	61	73	63
3000rpm 2 - pole															
380VD/660VY 50HZ															
112M	1MT8005-1BA23-3 □□□□	4	2935	91.8	92.7	0.88	7.5	13	8.5	2.4	3.2	0.0127	66	78	84
132S	1MT8005-1CA03-3 □□□□	5.5	2950	92.6	93.3	0.88	10.3	17.8	9.5	2.9	4	0.0240	66	78	104
132S	1MT8005-1CA13-3 □□□□	7.5	2950	93.3	94.1	0.89	13.7	24.3	9	3	4	0.0284	66	78	111
160M	1MT8005-1DA23-3 □□□□	11	2955	94.0	94.5	0.89	20	35.5	8.5	2.9	3.2	0.0697	66	79	190
160M	1MT8005-1DA33-3 □□□□	15	2960	94.5	95.0	0.89	27	48.4	9	3.1	3.5	0.0789	66	79	203
160L	1MT8005-1DA43-3 □□□□	18.5	2960	94.9	95.4	0.89	33.5	59.7	9	3.1	3.5	0.0843	66	79	210
180M	1MT8005-1EA23-3 □□□□	22	2975	95.1	95.2	0.88	40	70.6	9	2.8	3.2	0.190	67	80	281
200L	1MT8005-2AA43-3 □□□□	30	2975	95.5	95.6	0.88	54	96.3	9.5	2.9	3.5	0.313	71	84	389
200L	1MT8005-2AA53-3 □□□□	37	2984	95.8	95.7	0.88	67	118	10.5	3	3.5	0.352	71	84	396
225M	1MT8005-2BA23-3 □□□□	45	2982	96.0	96.0	0.89	80	144	10	3.3	3.5	0.619	72	85	500
250M	1MT8005-2CA23-3 □□□□	55	2982	96.2	96.2	0.89	98	176	8.5	3	3.5	0.838	75	89	600
280S	1MT8005-2DA03-3 □□□□	75	2982	96.5	96.5	0.89	133	240	8.5	3.3	3.3	0.963	75	89	740
280M	1MT8005-2DA23-3 □□□□	90	2980	96.6	96.7	0.89	159	288	8.5	3.3	3.3	0.994	75	89	750
315S	1MT8005-3AA03-3 □□□□	110	2986	96.8	96.8	0.90	192	352	8.5	3.5	3	2.08	77	92	1110
315M	1MT8005-3AA23-3 □□□□	132	2986	96.9	97.0	0.90	230	422	8.5	3.5	3	2.20	77	92	1150
315L	1MT8005-3AA53-3 □□□□	160	2986	97.0	97.0	0.90	280	512	8.5	3.8	3	2.54	77	92	1320
315L	1MT8005-3AA63-3 □□□□	185	2984	97.1	97.3	0.90	320	592	8.5	3.8	3	2.72	77	92	1350
315L	1MT8005-3AA73-3 □□□□	200	2984	97.2	97.4	0.90	345	640	8.5	3.8	3	2.89	77	92	1400
355M	1MT8005-3BA23-3 □□□□	220	2988	97.2	97.1	0.91	380	703	9	3.3	3.5	3.71	83	98	1860
355M	1MT8005-3BA33-3 □□□□	250	2988	97.2	97.2	0.91	430	799	9	3.3	3.5	3.71	83	98	1860
355L	1MT8005-3BA53-3 □□□□	280	2986	97.2	97.2	0.91	480	896	9	3.3	3.5	3.71	83	98	1860
355L	1MT8005-3BA63-3 □□□□	315	2984	97.2	97.3	0.91	540	1008	9	3.3	3.5	3.71	83	98	1860

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 1 级, IE5

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动 转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise LpfA	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
1500rpm 4 - pole															
220VD/380VY 50HZ															
80M	1MT8005-0DB22-1 □□□□	0.55	1455	86.7	87	0.75	1.29	3.6	8.5	3.4	4.2	0.0040	44	56	38
80M	1MT8005-0DB32-1 □□□□	0.75	1465	88.2	88.6	0.75	1.72	4.9	8.5	2.7	4	0.0053	44	56	40
90S	1MT8005-0EB02-1 □□□□	1.1	1460	89.5	90.2	0.75	2.50	7.2	8.5	3	4	0.0046	47	59	45
90L	1MT8005-0EB42-1 □□□□	1.5	1470	90.4	91	0.76	3.30	9.7	8.8	3	4	0.0076	47	59	52
100L	1MT8005-1AB42-1 □□□□	2.2	1470	91.4	91.7	0.79	4.65	14.3	10	2.7	4	0.0210	55	67	73
100L	1MT8005-1AB52-1 □□□□	3	1480	92.1	92.4	0.79	6.3	19.4	10.5	2.4	4.2	0.0250	55	67	76
1500rpm 4 - pole															
380VD/660VY 50HZ															
112M	1MT8005-1BB23-3 □□□□	4	1482	92.8	93	0.78	0.88	25.8	10.5	2.9	4.4	0.0303	53	65	90
132S	1MT8005-1CB03-3 □□□□	5.5	1480	93.4	93.9	0.81	11	35.5	9	3	4	0.0590	56	68	125
132M	1MT8005-1CB23-3 □□□□	7.5	1484	94.0	94.3	0.81	15	48.3	9.5	3	4	0.0759	56	68	134
160M	1MT8005-1DB23-3 □□□□	11	1484	94.6	94.9	0.82	21.5	70.8	9.5	3.3	4	0.143	58	71	197
160L	1MT8005-1DB43-3 □□□□	15	1488	95.1	95.4	0.82	29	96.3	10.5	3.8	3.8	0.194	58	71	221
180M	1MT8005-1EB23-3 □□□□	18.5	1480	95.1	95.8	0.82	36	119	8.5	2.8	3.4	0.285	61	74	290
180L	1MT8005-1EB43-3 □□□□	22	1488	95.5	95.8	0.81	43	141	9.5	2.7	3	0.285	61	74	292
200L	1MT8005-2AB53-3 □□□□	30	1488	95.9	96.2	0.81	59	193	10	3.5	3.5	0.596	61	74	386
225S	1MT8005-2BB03-3 □□□□	37	1486	96.1	96.5	0.84	70	238	8.5	3	3.2	0.956	63	76	485
225M	1MT8005-2BB23-3 □□□□	45	1488	96.3	96.6	0.85	84	289	9	3	3.2	1.08	63	76	515
250M	1MT8005-2CB23-3 □□□□	55	1488	96.5	96.9	0.86	101	353	8.5	2.5	3.3	1.63	65	79	660
280S	1MT8005-2DB03-3 □□□□	75	1490	96.7	97.0	0.86	137	481	9	3.5	3	2.09	66	80	800
280M	1MT8005-2DB23-3 □□□□	90	1490	96.9	97.2	0.88	160	577	9	3.5	3	2.62	66	80	925
315S	1MT8005-3AB03-3 □□□□	110	1492	97.0	97.2	0.86	200	704	8.5	3.2	3	4.57	69	84	1450
315M	1MT8005-3AB23-3 □□□□	132	1492	97.1	97.3	0.86	240	845	8.5	3.2	3	4.83	69	84	1490
315L	1MT8005-3AB53-3 □□□□	160	1493	97.2	97.4	0.87	285	1023	9	3.2	3	5.39	71	86	1660
315L	1MT8005-3AB63-3 □□□□	185	1492	97.3	97.5	0.87	330	1184	9	3.2	3	5.88	71	86	1740
315L	1MT8005-3AB73-3 □□□□	200	1492	97.4	97.6	0.87	360	1280	9	3.2	3	6.10	71	86	1780
355M	1MT8005-3BB23-3 □□□□	220	1493	97.4	97.6	0.87	395	1407	9	2.7	3.2	5.76	80	95	1840
355M	1MT8005-3BB33-3 □□□□	250	1492	97.4	97.6	0.87	450	1600	9	2.7	3	5.76	80	95	1840
355L	1MT8005-3BB53-3 □□□□	280	1491	97.4	97.7	0.88	495	1793	8.5	2.5	3	6.04	80	95	1930
355L	1MT8005-3BB63-3 □□□□	315	1492	97.4	97.6	0.87	560	2016	8.5	2.5	3	6.51	80	95	2000

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选型技术数据表 Technical data table

中国能效等级 1 级, IE5

机座号 Frame Size	型号 Order No.	额定 功率 Rated Output	额定 转速 Rated Speed	效率 — 参照 GB18613-2020, 即 IEC 60034-30 Efficiency is in accordance with GB18613-2020, IEC 60034-30				额定 转矩 Rated torque	起动 电流 Starting Current	起动 转矩 Starting torque	最大 转矩 Max torque	转动惯量 Moment of inertia(J)	噪音 <sup>1)</sup> Noise LpFA	噪音 <sup>1)</sup> Noise LWA	重量 Weight IMB3
				效率 Efficiency at (50 HZ) 4/4 load	效率 Efficiency at (50 HZ) 3/4 load	功率 因数 Power factor	额定 电流 (380V) Rated current								
				KW	rpm	%	%								
1000rpm 6 - pole															
220VD/380VY 50HZ															
80M	1MT8005-0DC32-1 □□□□	0.55	965	84.2	84.4	0.67	1.48	5.4	7	3	3.4	0.0061	43	55	41
90S	1MT8005-0EC02-1 □□□□	0.75	965	85.7	86.4	0.7	1.90	7.4	7	2.6	3.2	0.0059	45	57	46
90L	1MT8005-0EC42-1 □□□□	1.1	975	87.2	87.7	0.7	2.75	10.8	7	2.6	3.2	0.0110	45	57	53
100L	1MT8005-1AC42-1 □□□□	1.5	970	88.4	88.8	0.71	3.65	14.8	7.8	3.2	3.5	0.0193	49	61	70
112M	1MT8005-1BC22-1 □□□□	2.2	965	89.7	90.4	0.71	5.2	21.8	7.8	3.5	4	0.0243	51	63	84
132S	1MT8005-1CC02-1 □□□□	3	982	90.6	91.3	0.72	7	29.2	8.5	3.2	4	0.0610	55	67	112
1000rpm 6 - pole															
380VD/660VY 50HZ															
132M	1MT8005-1CC23-3 □□□□	4	982	91.4	91.9	0.72	9.2	38.9	9	3.3	4	0.0758	55	67	126
132M	1MT8005-1CC33-3 □□□□	5.5	982	92.2	92.6	0.72	12.6	53.5	9.5	3.7	4.5	0.0824	55	67	132
160M	1MT8005-1DC23-3 □□□□	7.5	986	92.9	93.3	0.77	15.9	72.6	8.5	3.5	3	0.164	56	69	194
160L	1MT8005-1DC43-3 □□□□	11	990	93.7	94.1	0.77	23	106	9	3.7	3.2	0.235	56	69	224
180L	1MT8005-1EC43-3 □□□□	15	986	94.3	94.8	0.8	30	145	9	3.2	3.2	0.348	57	70	278
200L	1MT8005-2AC43-3 □□□□	18.5	988	94.6	95.0	0.8	37	179	9.5	3.2	3.2	0.635	59	72	350
200L	1MT8005-2AC53-3 □□□□	22	988	94.9	95.3	0.81	43.5	213	9.5	3.2	3.2	0.735	59	72	375
225M	1MT8005-2BC23-3 □□□□	30	990	95.3	95.7	0.82	58	289	9.5	3.4	3.2	1.26	61	74	489
250M	1MT8005-2CC23-3 □□□□	37	991	95.6	95.9	0.81	73	357	9	3.3	3.5	1.74	62	76	610
280S	1MT8005-2DC03-3 □□□□	45	991	95.8	96.2	0.83	86	434	8.5	3.8	3.3	2.08	62	76	710
280M	1MT8005-2DC23-3 □□□□	55	992	96.0	96.3	0.84	104	529	8.5	3.8	3.3	2.52	62	76	765
315S	1MT8005-3AC03-3 □□□□	75	992	96.3	96.7	0.82	144	722	8	2.6	2.5	3.92	66	81	1110
315M	1MT8005-3AC23-3 □□□□	90	992	96.5	96.9	0.83	171	866	8	2.7	2.5	4.47	66	81	1170
315L	1MT8005-3AC53-3 □□□□	110	992	96.6	97.0	0.83	210	1059	8	2.7	2.5	4.99	66	81	1330
315L	1MT8005-3AC63-3 □□□□	132	993	96.8	97.2	0.83	250	1269	8	2.9	2.5	6.45	66	81	1460
355S	1MT8005-3BC23-3 □□□□	160	994	96.9	97.0	0.84	300	1537	8.5	2.8	3.2	10.34	76	91	1810
355M	1MT8005-3BC33-3 □□□□	185	994	97.0	97.2	0.84	345	1777	8.5	3	3.2	10.34	76	91	1810
355M	1MT8005-3BC43-3 □□□□	200	994	97.0	97.2	0.84	375	1922	8.5	3	3.2	10.92	76	91	1850
355L	1MT8005-3BC53-3 □□□□	220	994	97.0	97.3	0.84	410	2114	8.5	3	3.2	12.11	76	91	2000
355L	1MT8005-3BC63-3 □□□□	250	994	97.0	97.2	0.84	465	2402	8.5	3	3.2	12.80	76	91	2060

注:

<sup>1)</sup> 当电动机在50Hz电源供电空载运行时, 噪音容差为+3dB。当在60Hz电源下空载运行时, 噪音容差为+4dB。

Note:

<sup>1)</sup> Noise value is only applicable to the direct power supply and the condition of no-load operation. If the motor in 50Hz power supply, the tolerance is +3dB. If the motor in 60Hz power supply, the tolerance is +4dB.

# 选件 Options

电动机订货号 Motor order code	选件号 Option Code <sup>1)</sup>	描述 Description	应用范围 Application Scope
<b>电压与频率</b> Voltages and frequency			
1MT8004/5-□□□□2-1□□□	—	220V Δ / 380VY 50 Hz (50Hz output, 50Hz功率输出)	FS80 ~ 280
1MT8004/5-□□□□3-3□□□	—	380V Δ / 660VY 50 Hz (50Hz output, 50Hz功率输出, 4 kW ~ 315 kW <sup>2)</sup> )	FS80 ~ 355
1MT8004/5-□□□□2-2□□□	—	230V Δ / 400VY 50 Hz (50Hz output, 50Hz功率输出)	FS80 ~ 280
1MT8004/5-□□□□3-4□□□	—	400V Δ / 690VY 50 Hz (50Hz output, 50Hz功率输出)	FS80 ~ 355
<b>绕组保护和轴承保护</b> Winding protection and bearing protection			
1MT8004/5-□□□□□-□□A□ <sup>2)</sup>	—	无绕组保护 Without motor protection	FS80 ~ 355
1MT8004/5-□□□□□-□□B□	—	绕组带一组三芯串联的 PTC 热敏电阻用于跳闸, 需用2个辅助接线端子 Motor protection with PTC thermistors with three embedded temperature sensors for tripping, need 2 terminals	FS80 ~ 355
1MT8004/5-□□□□□-□□C□	—	绕组带两组三芯串联的 PTC 热敏电阻用于报警和跳闸, 需用4个辅助接线端子 Motor protection with PTC thermistors with six embedded temperature sensors for alarm & tripping, need 4 terminals	FS80 ~ 355
1MT8004/5-□□□□□-□□H□-Z	—	绕组带3个单支两线制PT100测温元件, 需用6个辅助接线端子 Installation of 3 single 2 wires PT100 resistance thermometers, need 6 terminals	FS80 ~ 355
1MT8004/5-□□□□□-□□J□-Z	—	绕组带6个单支两线制PT100测温元件, 需用12个辅助接线端子 Installation of 6 single 2 wires PT100 resistance thermometers, need 12 terminals	FS180 ~ 355
—	Q04	绕组带 220 V 防潮加热带 Anti-condensation heating for 220 V	FS80 ~ 355
—	Q72	轴承带2个单支双线圈制PT100测温元件, 需用4个辅助接线端子 Installation of 2 single 2 wires PT100 resistance thermometers for bearings, need 4 terminals	FS160 ~ 355
<b>冷却与通风</b> Ventilation			
—	F76	金属风扇 Metal Fan	FS80 ~ 355

<sup>1)</sup> 订货时, 电动机订货号需带“-Z”, 另外附带上选件号。

<sup>1)</sup> When ordering, need supplement "-Z" after order number. Add option code after that.

<sup>2)</sup> 无需附加费用。

<sup>2)</sup> Without additional charge.

# 选件 Options

电动机订货号 Motor order code	选件号 Option Code <sup>1)</sup>	描述 Description	应用范围 Application Scope
<b>电动机接线盒</b> Motor connection box			
1MT8004/5-□□□□□□-□□□□4 <sup>2)</sup>	—	接线盒在顶端 Connection box on top 进线孔在右侧（从驱动端看）（标准电动机） cable entry on right (view from DE) (Standard version)	FS80 ~ 355
—	R10 <sup>3)</sup>	接线盒顺时针旋转 90° Clockwise rotate the connection box through 90°	FS80 ~ 355
—	R11	接线盒逆时针旋转 90° Counter-clockwise rotate the connection box through 90°	FS80 ~ 355
—	R12	接线盒直接旋转 180° Rotation of the connection box through 180°	FS80 ~ 355
—	X97	钢管布线孔 Conduit entry	FS80 ~ 355
—	X98	电机通过CNEEx认证且接线盒配备闷盖（客户自行安装葛兰） Single main terminal box with plugs, CNEEx certified. (Customers prepare and assemble cable glands by themselves)	FS80 ~ 355
—	R57	电机带一个辅助接线盒并配置闷盖（客户自行安装葛兰），位置在机座右侧（从轴伸端看） One auxiliary terminal box with plug (Without cable gland), RHS on housing viewed from drive end.	FS160 ~ 355
—	R58	电机带两个辅助接线盒并配置闷盖（客户自行安装葛兰），位置在机座左右侧各一个（从轴伸端看） Two auxiliary terminal boxes with plugs (Without cable glands), LHS and RHS each on housing viewed from drive end.	FS315 ~ 355
<b>轴承</b> bearing			
—	L80	SKF轴承 SKF bearings	FS80 ~ 355
—	L81	其他进口品牌轴承 Other import brand bearing	FS80 ~ 355
—	L20	驱动端轴承固定 Located bearing at DE	FS80 ~ 132
—	L22	增强悬臂力轴承设计 Bearing design for increased cantilever forces	FS160 ~ 355

<sup>1)</sup> 订货时，电动机订货号需带“-Z”，另外附带选件号。

<sup>2)</sup> 无需附加费用。

<sup>3)</sup> 选择此项时需留意安装环境，请确认进线孔前方有足够的空间用于接入电缆。

<sup>1)</sup> When ordering, need supplement "-Z" after order number. Add option code after that.

<sup>2)</sup> Without additional charge.

<sup>3)</sup> When ordering this option, please take care about the installation location that whether there is enough space for cable inserting.

# 选件 Options

电动机订货号 Motor order code	选件号 Option Code <sup>1)</sup>	描述 Description	应用范围 Application Scope
<b>机械设计和防护等级</b> Mechanical design and degrees of protection			
—	H70	第二外部接地 2nd External grounding	FS80 ~ 355
—	H22	IP56 防护等级 (非高海况) IP56 degree of protection (non-heavy-sea)	FS80 ~ 355
—	H20	IP65 防护等级 IP65 degree of protection	FS80 ~ 355
<b>铭牌和测试证书</b> Rating plate and test certificates			
—	B80	出厂检验报告 Acceptance test certificate 3.1 in accordance with EN 10204	FS80 ~ 355
—	W9P	能效标签及合格证不贴, 随机带走 CEL label and quality certificate not pasted, delivered with motors	FS80 ~ 355
<b>颜色和喷漆</b> Colors and Paint finish			
—	S01	不喷漆, 只带底漆 Unpainted, only primed	FS80 ~ 355
—	W88	适用于TH,W,F1,WF1以及海洋性气候环境用电机 Design for TH, W, F1, WF1 and sea-air resistance	FS80 ~ 355
<b>包装</b> Packing			
—	B90	包装 (FS80 ~ 132 电动机采用纸箱包装, FS160 ~ 355 电动机采用木箱包装) Packing (FS100~132 motors adopt the carton packaging, FS160~355 motors adopt the wooden cases packaging)	FS80 ~ 355
—	V9N	法兰安装电机用简易托盘 Simple tray for flange mounted motors	FS160 ~ 280

<sup>1)</sup> 订货时, 电动机订货号需带“-Z”, 另外附上选件号。


<sup>1)</sup> When ordering, need supplement "-Z" after order number. Add option code after that.

# 外形尺寸 Dimension drawings


1MT8004隔爆系列电动机 Flameproof series motor 1MT8004

机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

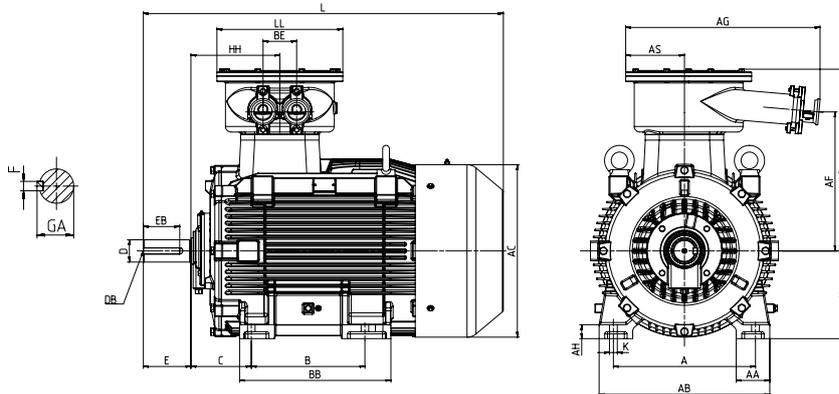

IM B35 安装结构型式 Type of construction IM B35

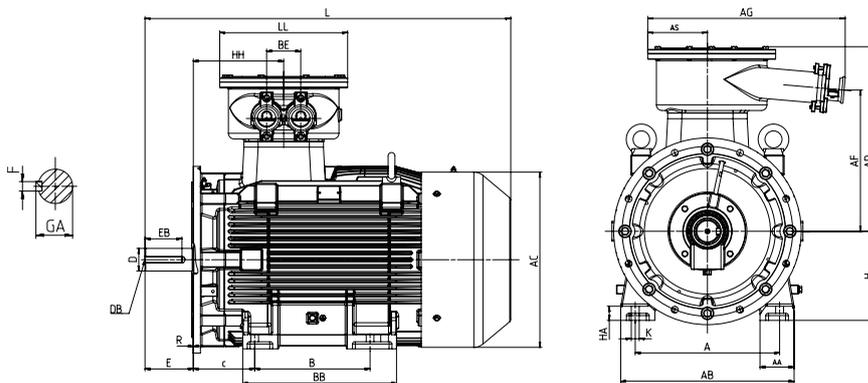


机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance												
			A		C		D		E		F		GA	H	
			B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension		极限偏差 tolerance	基本尺寸 dimension
80M	0DA2, 0DA3, 0DB2, 0DB3, 0DC3	2,4,6	125	100	50	±1.5	19	+0.009 -0.004	40	0 -0.3	6	0 -0.036	21.5	80	0 -0.5
90S	0EA0, 0EB0, 0EC0	2,4,6	140	100	56	±1.5	24	+0.009 -0.004	50	±0.3	8	0 -0.036	27	90	0 -0.5
90L	0EA4, 0EB4, 0EC4	2,4,6		125											
100L	1AA4, 1AB4, 1AB5, 1AC4	2,4,6	160	140	63	±2.0	28	+0.009 -0.004	60	±0.3	8	0 -0.036	31	100	0 -0.5
112M	1BA2, 1BB2, 1BC2	2,4,6	190	140	70	±2.0	28	+0.009 -0.004	60	±0.3	8	0 -0.036	31	112	0 -0.5
132S	1CA0, 1CA1, 1CB0, 1CC0, 1CD0	2,4,6,8	216	140	89	±2.0	38	+0.018 +0.002	80	±0.3	10	0 -0.036	41	132	0 -0.5
132M	1CB2, 1CC2, 1CC3, 1CD2	4,6,8		178											
160M	1DA2, 1DA3, 1DB2, 1DC2, 1DD2, 1DD3	2,4,6,8	254	210	108	±3.0	42	+0.018 +0.002	110	±0.43	12	0 -0.043	45	160	0 -0.5
160L	1DA4, 1DB4, 1DC4, 1DD4	2,4,6,8		254											
180M	1EA2, 1EB2	2,4	279	241	121	±3.0	48	+0.018 +0.002	110	±0.43	14	0 -0.043	51.5	180	0 -0.5
180L	1EB4, 1EC4, 1ED4	4,6,8		279											
200L	2AA4, 2AA5, 2AB5, 2AC4, 2AC5, 2AD5	2,4,6,8	318	305	133	±3.0	55	+0.03 +0.011	110	±0.43	16	0 -0.043	59	200	0 -0.5


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

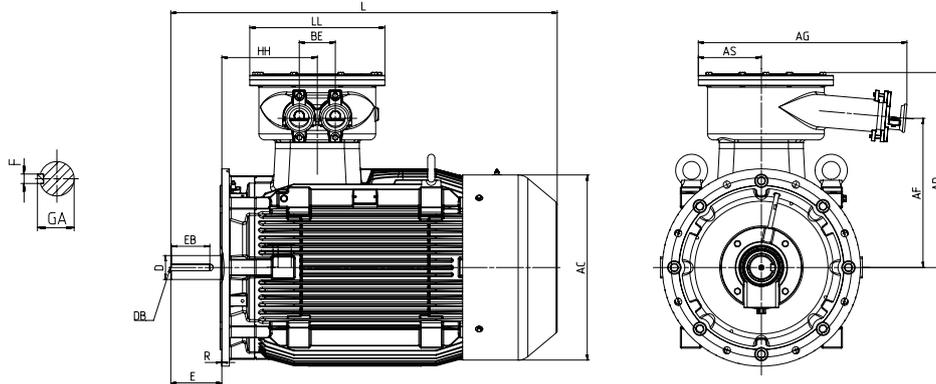

IM B14 安装结构型式 Type of construction IM B14

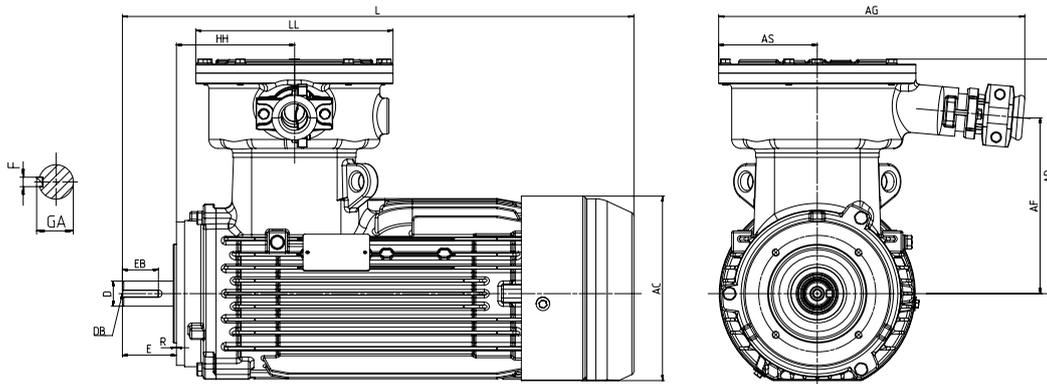

机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K		AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	EB		AQ	L1	HH	R
			基本尺寸 dimension	极限偏差 tolerance														基本尺寸 dimension	极限偏差 tolerance				
80M	0DA2, 0DA3, 0DB2, 0DB3, 0DC3	2,4,6	10	+0.36 0	155	179	245	430	33.5	170	340	105	158	68	9	210	M6*16	32	+0.3 0	190	475	117	0
90S	0EA0, 0EB0, 0EC0	2,4,6	10	+0.36 0	170	193	255	480/525 520/565	33.5	177	340	105	159.5	-	11	197	M8*19	40	0 -0.62	165	525	125.5	0
90L	0EA4, 0EB4, 0EC4	2,4,6											179.5								565		
100L	1AA4, 1AB4, 1AB5, 1AC4	2,4,6	12	+0.43 0	196	227	265	575	45	196	344.5	109.5	215	-	12	219	M10*22	40	0 -0.62	195	625	131	0
112M	1BA2, 1BB2, 1BC2	2,4,6	12	+0.43 0	226	247	268	590	45	197	344.5	109.5	215	-	12	219	M10*22	40	0 -0.62	205	635	136	0
132S	1CA0, 1CA1, 1CB0, 1CC0, 1CD0	2,4,6,8	12	+0.43 0	256	295	303	610	50	233	345	109.5	240	-	15	219	M12*28	56	0 -0.74	240	660	137	0
132M	1CB2, 1CC2, 1CC3, 1CD2	4,6,8						665					299								710		
160M	1DA2, 1DA3, 1DB2, 1DC2, 1DD2, 1DD3	2,4,6,8	15	+0.43 0	300	348	360	780	60	271	398.5	128.5	325	-	18	257	M16*36	80	0 -0.74	295	840	173	0
160L	1DA4, 1DB4, 1DC4, 1DD4	2,4,6,8						815					368								875		
180M	1EA2, 1EB2	2,4	15	+0.43 0	339	402	380	900	60	292	398.5	128.5	328	-	20	257	M16*36	80	0 -0.74	330	955	186	0
180L	1EB4, 1EC4, 1ED4	4,6,8																					
200L	2AA4, 2AA5, 2AB5, 2AC4, 2AC5, 2AD5	2,4,6,8	19	+0.52 0	378	438	420	935	70	315	448	148	401	-	25	296	M20*42	80	0 -0.74	370	995	208	0

<sup>1)</sup> Measured across the bolt heads.


<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.

# 外形尺寸 Dimension drawings


1MT8004隔爆系列电动机 Flameproof series motor 1MT8004

机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

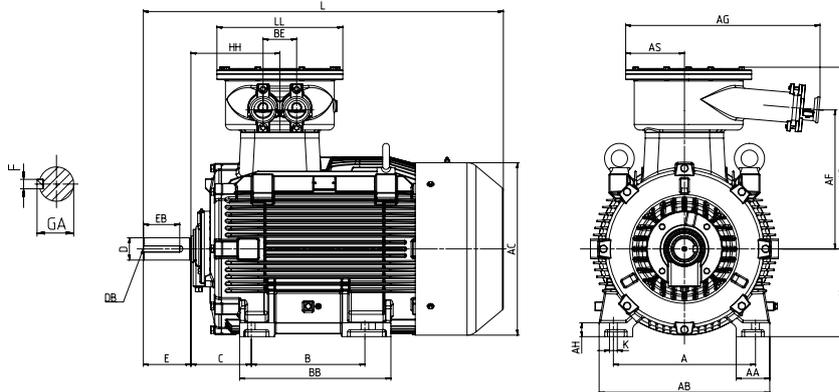

IM B35 安装结构型式 Type of construction IM B35

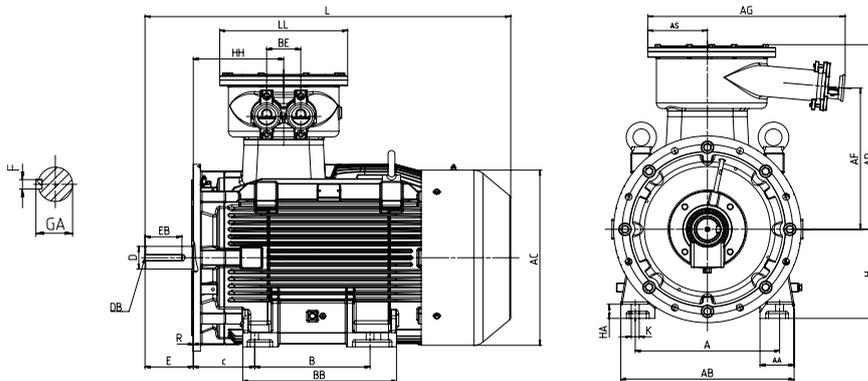


机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance												
			A		C		D		E		F		GA	H	
			B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension		极限偏差 tolerance	基本尺寸 dimension
225S	2BB0,2BD0	4,8	356	286	149	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	225	0 -0.5
225M	2BA2	2	356	311	149	±4.0	55	+0.03 +0.011	110	±0.43	16	0 -0.043	59	225	0 -0.5
	2BB2,2BC2	4,6	356	311	149	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	225	0 -0.5
	2BD2	8													
250M	2CA2	2	406	349	168	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	250	0 -0.5
	2CB2,2CC2,2CD2	4,6,8	406	349	168	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	250	0 -0.5
280S	2DA0	2	457	368	190	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	280	0 -1
	2DB0,2DC0,2DD0	4,6,8													
280M	2DA2	2	419	368	190	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	280	0 -1
	2DB2, 2DC2, 2DD2	4,6,8													


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

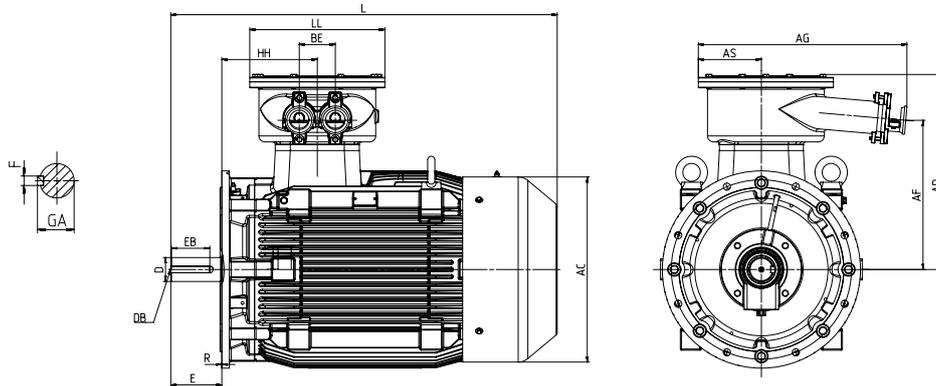

IM B14 安装结构型式 Type of construction IM B14

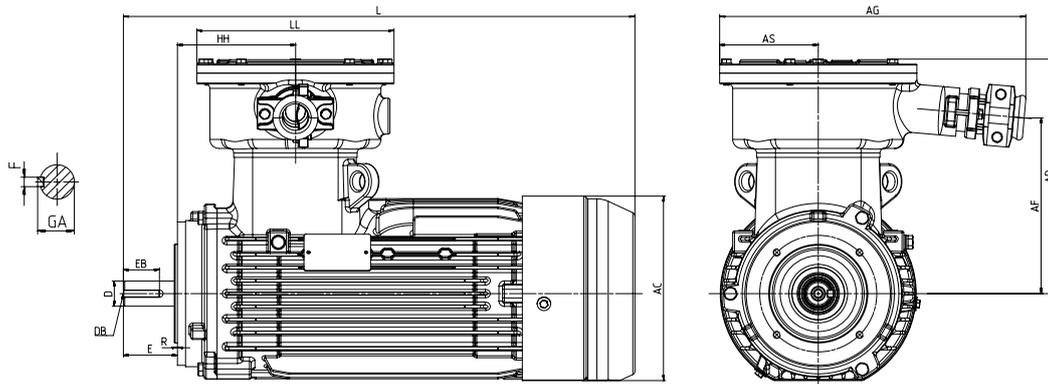

机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K												EB								
			基本尺寸 dimension	极限偏差 tolerance	AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	基本尺寸 dimension	极限偏差 tolerance	AQ	L1	HH	R
225S	2BB0,2BD0	4,8	19	+0.52 0	436	479	445	960	80	340	448	148	371	-	34	296	M20*42	100	0 -0.87	420	1015	222	0
225M	2BA2	2	19	+0.52 0	436	479	445	1010	80	340	448	148	391	-	34	296	M20*42	80	0 -0.74	420	1065	222	0
	2BB2,2BC2	4,6	19	+0.52 0	436	479	445	1040 960	80	340	448	148	391	-	34	296	M20*42	100	0 -0.87	420	1095	222	0
	2BD2	8											371								1015		
250M	2CA2	2	24	+0.52 0	490	528	530	1065	100	410	551.5	166.5	449	-	40	363	M20*42	100	0 -0.87	460	1130	254	0
	2CB2,2CC2,2CD2	4,6,8	24	+0.52 0	490	528	530	1065	100	410	551.5	166.5	449	-	40	363	M20*42	100	0 -0.87	460	1130	254	0
280S	2DA0	2	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0
	2DB0,2DC0,2DD0	4,6,8																					
280M	2DA2	2	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0
	2DB2, 2DC2, 2DD2	4,6,8																					


<sup>1)</sup> Measured across the bolt heads.

<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.


# 外形尺寸 Dimension drawings

1MT8004隔爆系列电动机 Flameproof series motor 1MT8004  
机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

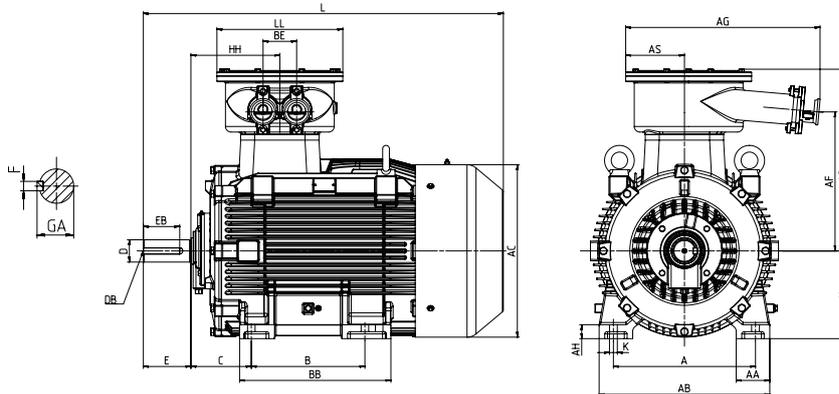

IM B35 安装结构型式 Type of construction IM B35

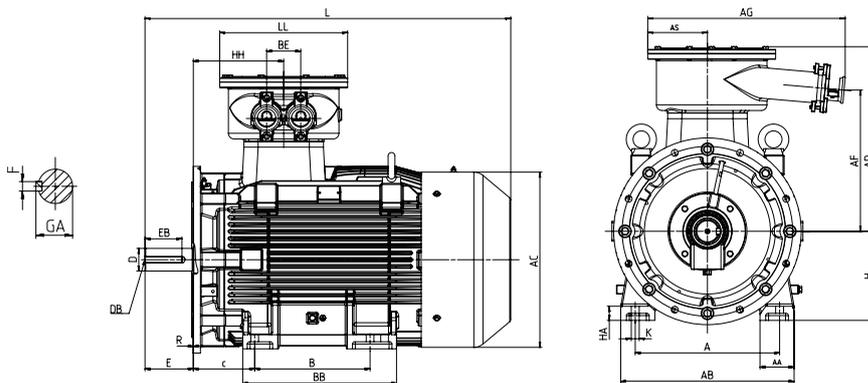


机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance												
			A		C		D		E		F		GA	H	
			A	B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance		基本尺寸 dimension	极限偏差 tolerance
315S	3AA0	2	406	216	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	315	0 -1	
	3AB0,3AC0,3AD0	4,6,8				80		170		22	0 -0.052	85			
315M	3AA2	2	508	457	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	315	0 -1	
	3AB2,3AC2,3AD2	4,6,8				80		170		22	0 -0.052	85			
315L	3AA5,3AA6,3AA7	2	508	457	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	315	0 -1	
	3AB5,3AB6,3AB7,3AC5,3AC6, 3AD5,3AD6	4,6,8				80		170		22	0 -0.052	85			
355S	3BC2,3BD2	2	500	254	±4.0	75	+0.030 +0.011	140	±0.5	20	0 -0.052	79.5	355	0 -1	
		4,6,8				95	+0.035 +0.013	170		25		100			
355M	3BA2,3BA3	2	610	560	±4.0	75	+0.030 +0.011	140	±0.5	20	0 -0.052	79.5	355	0 -1	
	3BB2,3BB3,3BC3,3BC4,3BD3	4,6,8				95	+0.035 +0.013	170		25		100			
355L	3BA5,3BA6	2	630	560	±4.0	75	+0.030 +0.011	140	±0.5	20	0 -0.052	79.5	355	0 -1	
	3BB5,3BB6,3BC5,3BC6, 3BD5,3BD6	4,6,8				95	+0.035 +0.013	170		25		100			


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

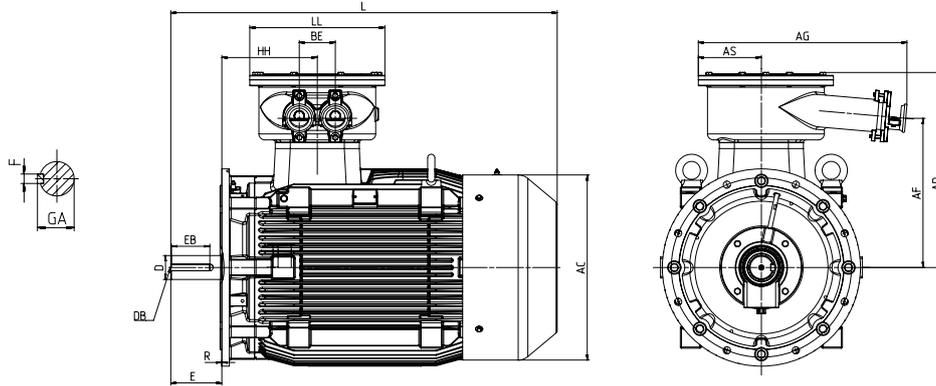

IM B14 安装结构型式 Type of construction IM B14

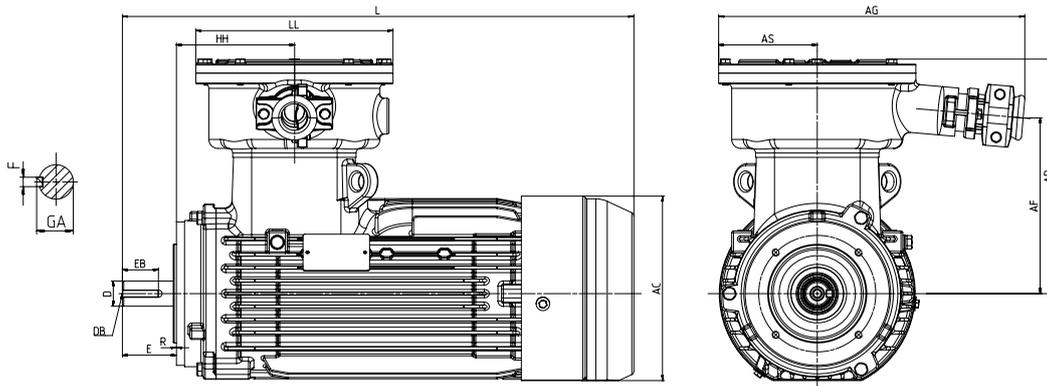

机座号 Frame size	订货号 MLFB 1MT8004-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K												EB								
			基本尺寸 dimension	极限偏差 tolerance	AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	基本尺寸 dimension	极限偏差 tolerance	AQ	L1	HH	R
315S	3AA0	2					1260										100	0 -0.87		1330			
	3AB0,3AC0,3AD0	4,6,8					1290										130	0 -1.00		1360			
315M	3AA2	2	28	+0.52 0	610	634	660	1260	120	499	700	210	541	120	50	450	M20*42	100	0 -0.87	580	1330	318	0
	3AB2,3AC2,3AD2	4,6,8						1290										130	0 -1.00				
315L	3AA5,3AA6,3AA7	2					1410											100	0 -0.87		1480		
	3AB5,3AB6,3AB7,3AC5, 3AC6,3AD5,3AD6	4,6,8					1440						700					130	0 -1.00		1510		
355S	3BC2,3BD2	2					1485										M20*42	125			1555		
		4,6,8					1515										M24*50	140			1585		
355M	3BA2,3BA3 3BB2,3BB3,3BC3,3BC4, 3BD3	2	28	+0.52 0	730	712	720	1485	120	565	700	210	696	120	53	450	M20*42	125	0 -1.00	665	1555	319	0
		1515						M24*50										140					
355L	3BA5,3BA6 3BB5,3BB6,3BC5,3BC6, 3BD5,3BD6	2					1575										M20*42	125			1645		
		4,6,8					1605						766				M24*50	140			1675		

<sup>1)</sup> Measured across the bolt heads.


<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.

# 外形尺寸 Dimension drawings


1MT8005隔爆系列电动机 Flameproof series motor 1MT8005

机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

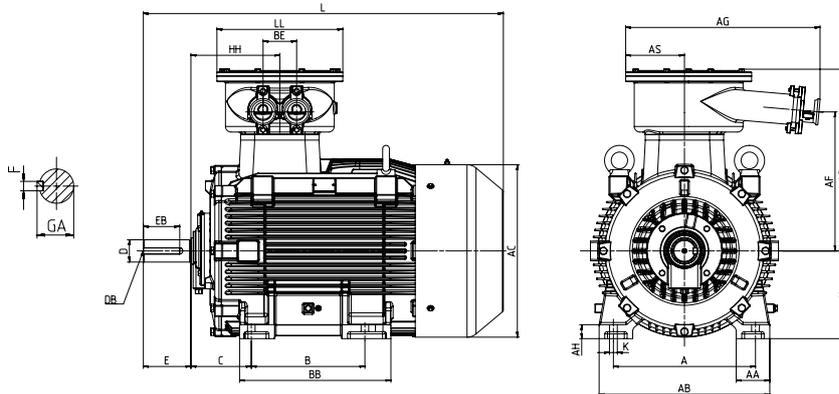

IM B35 安装结构型式 Type of construction IM B35

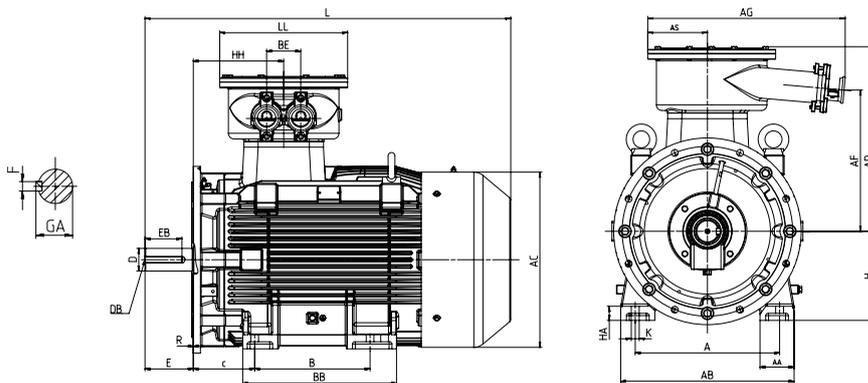


机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance												
			A		C		D		E		F		GA	H	
			B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension		极限偏差 tolerance	
80M	0D□2, 0D□3	2,4,6	125	100	50	±1.5	19	+0.009 -0.004	40	0 -0.3	6	0 -0.036	21.5	80	0 -0.5
90S	0E□0	2,4,6	140	100	56	±1.5	24	+0.009 -0.004	50	±0.3	8	0 -0.036	27	90	0 -0.5
90L	0E□4	2,4,6	125	100											
100L	1A□4, 1A□5	2,4,6	160	140	63	±2.0	28	+0.009 -0.004	60	±0.3	8	0 -0.036	31	100	0 -0.5
112M	1B□2	2,4,6	190	140	70	±2.0	28	+0.009 -0.004	60	±0.3	8	0 -0.036	31	112	0 -0.5
132S	1C□0, 1C□1	2,6,8	216	140	89	±2.0	38	+0.018 +0.002	80	±0.37	10	0 -0.036	41	132	0 -0.5
	1C□0	4		140											
132M	1C□2, 1C□3	4,6,8		178											
160M	1D□2, 1D□3	2,4,6,8	254	210	108	±3.0	42	+0.018 +0.002	110	±0.43	12	0 -0.043	45	160	0 -0.5
160L	1D□3, 1D□4			254											
180M	1E□2	2,4	279	241	121	±3.0	48	+0.018 +0.002	110	±0.43	14	0 -0.043	51.5	180	0 -0.5
180L	1E□4	4,6,8		279											
200L	2A□4, 2A□5	2,4,6,8	318	305	133	±3.0	55	+0.03 +0.011	110	±0.43	16	0 -0.043	59	200	0 -0.5


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

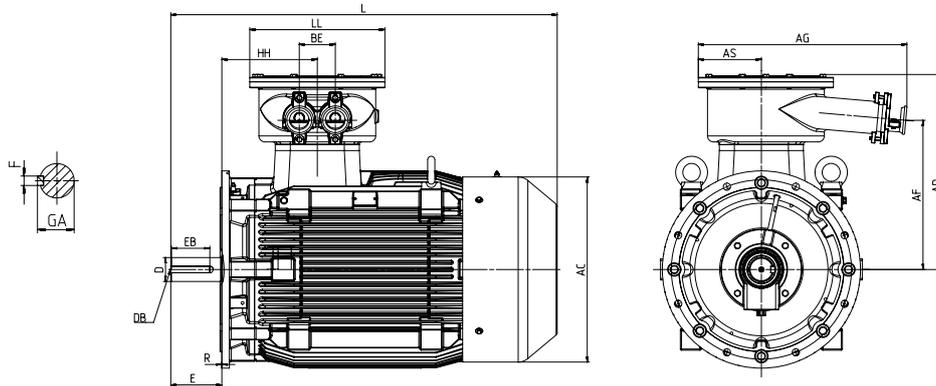

IM B14 安装结构型式 Type of construction IM B14

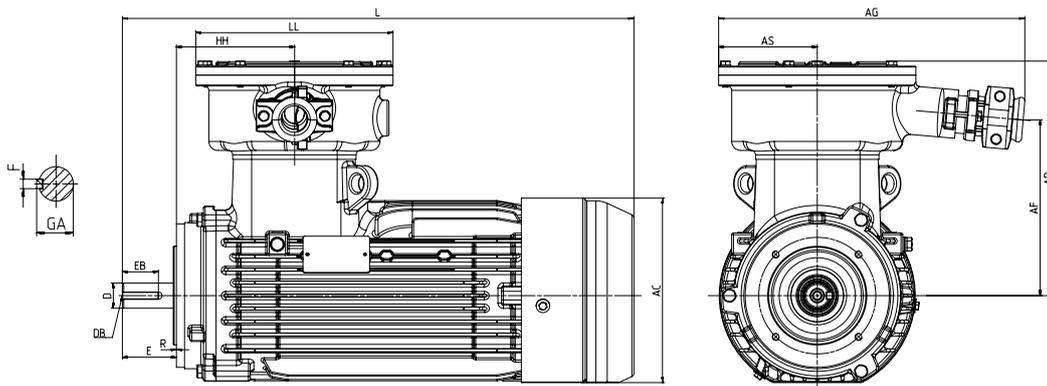

机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K											EB					AQ	L1	HH	R	
			基本尺寸 dimension	极限偏差 tolerance	AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	基本尺寸 dimension					极限偏差 tolerance
80M	0D□2, 0D□3	2,4,6	10	+0.36 0	155	179	245	430	33.5	170	340	105	158	-	9	210	M6*16	32	+0.3 0	190	475	117	0
90S	0E□0	2,4,6	10	+0.36 0	170	193	255	480/525	33.5	177	340	105	159.5	-	11	197	M8*19	40	0 -0.62	165	525 565	125.5	0
90L	0E□4	2,4,6	10	+0.36 0	170	193	255	520/565	33.5	177	340	105	179.5	-	11	197	M8*19	40	0 -0.62	165	525 565	125.5	0
100L	1A□4, 1A□5	2,4,6	12	+0.43 0	196	227	265	575	45	196	344.5	109.5	215	-	12	219	M10*22	40	0 -0.62	195	625	131	0
112M	1B□2	2,4,6	12	+0.43 0	226	247	273	590	45	204	344.5	109.5	215	-	12	219	M10*22	40	0 -0.62	205	635	136	0
132S	1C□0, 1C□1	2,6,8	12	+0.43 0	256	295	303	610	50	233	344.5	109.5	240	-	15	219	M12*28	56	0 -0.74	240	660	137	0
	1C□0	665						299					710										
132M	1C□2, 1C□3	4,6,8	12	+0.43 0	256	295	303	665	50	233	344.5	109.5	299	-	15	219	M12*28	56	0 -0.74	240	710 710	137	0
160M	1D□2, 1D□3	2,4,6,8	15	+0.43 0	300	348	360	780	60	271	398.5	128.5	325	-	18	257	M16*36	80	0 -0.74	295	840	173	0
160L	1D□3, 1D□4	815						368					875										
180M	1E□2	2,4	15	+0.43 0	339	402	380	900	60	292	398.5	128.5	328	-	20	257	M16*36	80	0 -0.74	330	955	186	0
180L	1E□4	4,6,8						378					438								420		

<sup>1)</sup> Measured across the bolt heads.


<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.

# 外形尺寸 Dimension drawings


1MT8005隔爆系列电动机 Flameproof series motor 1MT8005

机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

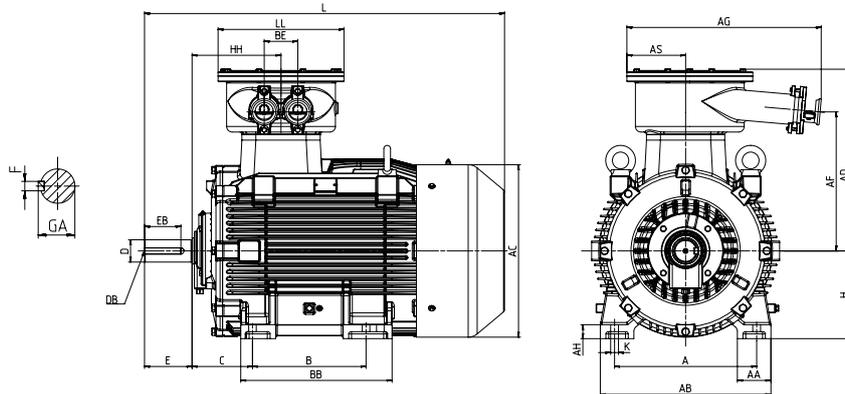

IM B35 安装结构型式 Type of construction IM B35

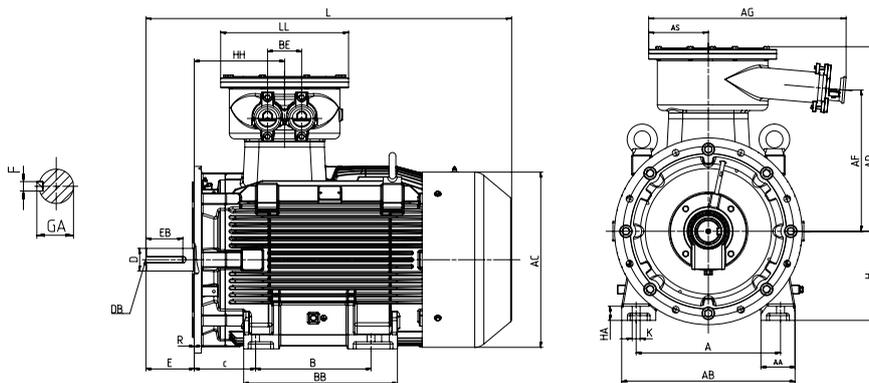


机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance												
			A		C		D		E		F		GA	H	
			B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension		极限偏差 tolerance	基本尺寸 dimension
225S	2B□0	4	356	286	149	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	225	0 -0.5
		8	356	311	149	±4.0	55	+0.03 +0.011	110	±0.43	16	0 -0.043	59	225	0 -0.5
225M	2B□2	2	356	311	149	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	225	0 -0.5
		4,6,8	356	311	149	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	225	0 -0.5
250M	2C□2	2	406	349	168	±4.0	60	+0.03 +0.011	140	±0.5	18	0 -0.043	64	250	0 -0.5
		4,6,8	406	349	168	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	250	0 -0.5
280S	2D□0	2	457	368	190	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	280	0 -1
		4,6,8					75	20			0 -0.052	79.5			
280M	2D□2	2	457	419	190	±4.0	65	+0.03 +0.011	140	±0.5	18	0 -0.043	69	280	0 -1
		4					75	20			0 -0.052	79.5			
		6,8					75	20			0 -0.052	79.5			


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

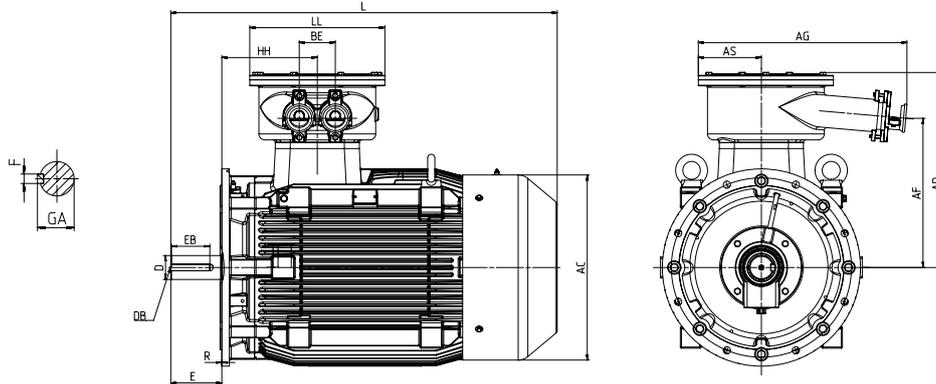

IM B14 安装结构型式 Type of construction IM B14

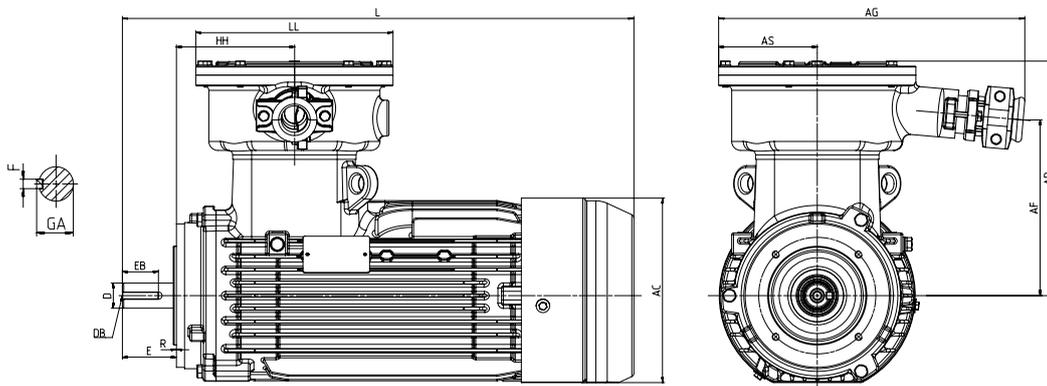

机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K											EB					AQ	L1	HH	R	
			基本尺寸 dimension	极限偏差 tolerance	AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	基本尺寸 dimension					极限偏差 tolerance
225S	2B□0	4	19	+0.52 0	436	479	445	1040 960	80	340	448	148	391 371	-	34	296	M20*42	100	0 -0.87	420	1095 1015	222	0
		8	19	+0.52 0	436	479	445	1010	80	340	448	148	391	-	34	296	M20*42	80	0 -0.74	420	1065	222	0
225M	2B□2	2	19	+0.52 0	436	479	445	1040	80	340	448	148	391	-	34	296	M20*42	100	0 -0.87	420	1095	222	0
		4,6	19	+0.52 0	436	479	445	1040	80	340	448	148	391	-	34	296	M20*42	100	0 -0.87	420	1095	222	0
250M	2C□2	2	24	+0.52 0	490	528	530	1065	100	410	551.5	166.5	449	-	40	363	M20*42	100	0 -0.87	460	1130	254	0
		4,6,8	24	+0.52 0	490	528	530	1065	100	410	551.5	166.5	449	-	40	363	M20*42	100	0 -0.87	460	1130	254	0
280S	2D□0	2	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0
		4,6,8	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0
280M	2D□2	2	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0
		4	24	+0.52 0	540	564	550	1170	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1235	242	0
		6,8	24	+0.52 0	540	564	550	1110	100	428	551.5	166.5	479	95	40	363	M20*42	100	0 -0.87	520	1175	242	0

<sup>1)</sup> Measured across the bolt heads.


<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.

# 外形尺寸 Dimension drawings


1MT8005隔爆系列电动机 Flameproof series motor 1MT8005

机座号从 80M ~ 355M Frame sizes 80M to 355M

IM B3 安装结构型式 Type of construction IM B3

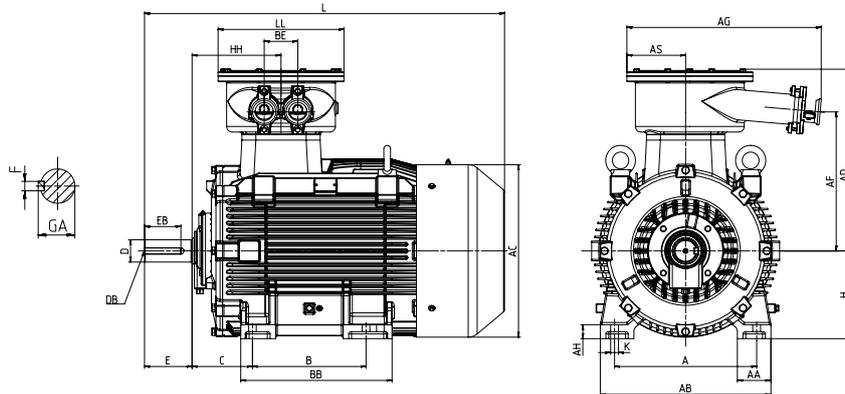

IM B35 安装结构型式 Type of construction IM B35

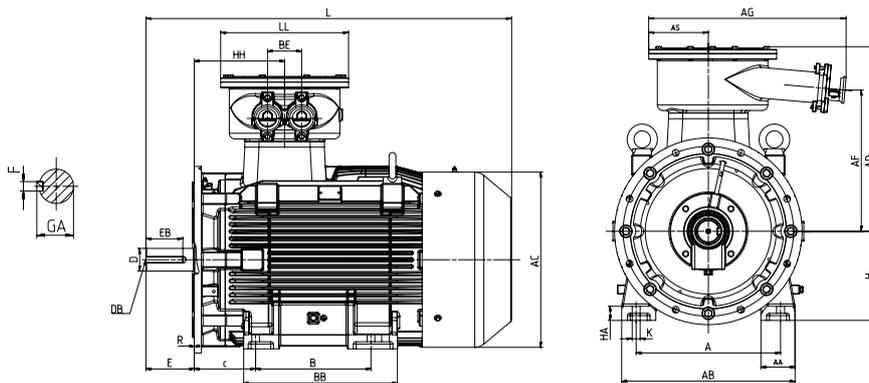


机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance														
			A		C		D		E		F		GA	H			
			B <sup>2)</sup>	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	基本尺寸 dimension		极限偏差 tolerance	基本尺寸 dimension	极限偏差 tolerance	
315S	3A□0	2	508	406	216	±4.0	65	+0.03	140	±0.5	18	0	69	315	0		
		4					+0.011	22			-0.043	-1					
		6,8					80	0			-0.052	85					
315M	3A□2	2	508	457	216	±4.0	65	+0.03	140	±0.5	18	0	69	315	0		
		4					+0.011	22			-0.043	-1					
		6,8					80	0			-0.052	85					
315L	3A□5, 3A□6, 3A□7	2	508	508	216	±4.0	65	+0.03	140	±0.5	18	0	69	315	0		
		4					+0.011	22			-0.043	-1					
3A□5, 3A□6	6,8	80	0	-0.052	85												
355S	3B□2	6,8	500	560	254	±4.0	95	+0.035	170	±0.5	25	100	355	0	-1		
355M	3B□2, 3B□3	2					75	+0.030			140					20	79.5
		4,6,8					610	95			+0.035					170	25
3B□2, 3B□3, 3B□4	4,6,8	610	254	±4.0	95	+0.035	170	±0.5	25	0	100	355	0	-1			
355L	3B□5, 3B□6	2	630	630	254	±4.0	75	+0.030	140	±0.5	20	79.5	355	0	-1		
		4,6,8					95	+0.035			170					25	100


<sup>1)</sup> 含螺钉头测量尺寸。

<sup>2)</sup> 该尺寸为DIN EN 50347 标准所列机座号对应尺寸。

IM B5 以及 IM V1 安装结构型式 Type of construction IM B5 and IM V1

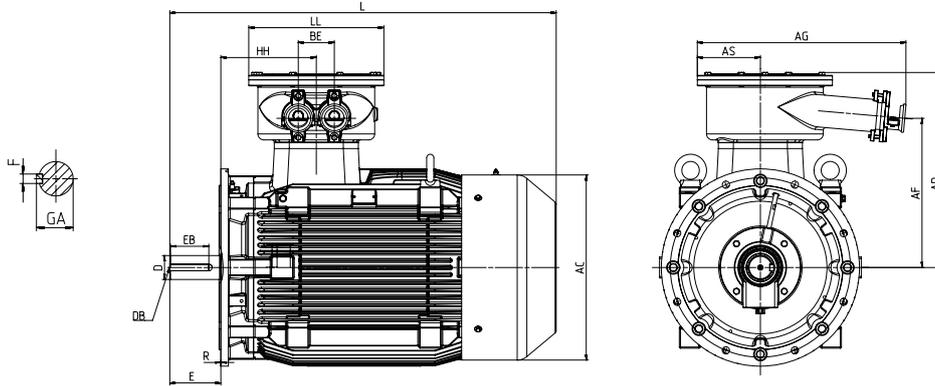

IM B14 安装结构型式 Type of construction IM B14

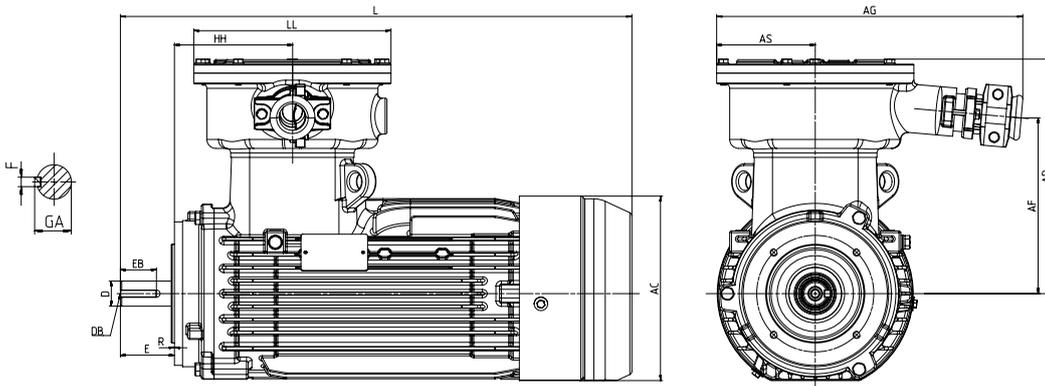

机座号 Frame size	订货号 MLFB 1MT8005-	极数 Poles	尺寸及公差/mm Dimension and tolerance																				
			K												EB								
			基本尺寸 dimension	极限偏差 tolerance	AB	AC <sup>1)</sup>	AD	L	AA	AF	AG	AS	BB	BE	HA	LL	DB	基本尺寸 dimension	极限偏差 tolerance	AQ	L1	HH	R
315S	3A□0	2	28	+0.52 0	610	634	660	1260	120	499	700	210	541	120	50	450	M20*42	100	0	580	1330	318	0
		1440						700					130					0	1510				
		1290						541					1360					-1.00	1360				
315M	3A□2	2	28	+0.52 0	610	634	660	1260	120	499	700	210	541	120	50	450	M20*42	100	0	580	1330	318	0
		1440						700					130					0	1510				
		1290						541					1360					-1.00	1360				
315L	3A□5, 3A□6, 3A□7	2	28	+0.52 0	610	634	660	1410	120	499	700	210	541	120	50	450	M20*42	100	0	580	1480	318	0
		1580						700					130					0	1650				
		1440						1360					-1.00					1510					
355S	3B□2	6,8	28	+0.52 0	730	712	720	1515	120	565	700	210	696	120	53	450	M24*50	140	0	665	1585	319	0
		1575						766					125					-1.00	1645				
		1515						696					140					0	1585				
355M	3B□2, 3B□3	2	28	+0.52 0	730	712	720	1575	120	565	700	210	766	120	53	450	M20*42	125	0	665	1645	319	0
		1515						696					140					-1.00	1585				
		1515						696					140					0	1585				
355L	3B□5, 3B□6	2	28	+0.52 0	730	712	720	1575	120	565	700	210	766	120	53	450	M20*42	125	0	665	1645	319	0
		1605						766					140					-1.00	1675				
		1605						766					140					0	1675				

<sup>1)</sup> Measured across the bolt heads.


<sup>2)</sup> This dimension is assigned in DIN EN 50347 to the frame size listed.

# 外形尺寸 Dimension drawings

## 法兰尺寸 Flange dimension


IM B5、IM B35、IM V1、IM V3 安装结构型式

Type of construction IM B5, IM B35, IM V1, IM V3

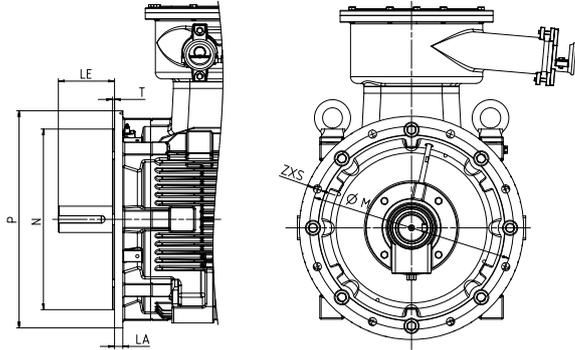

IM B14、IM V18、IM V19 安装结构型式

Type of construction IM B14, IM V18, IM V19

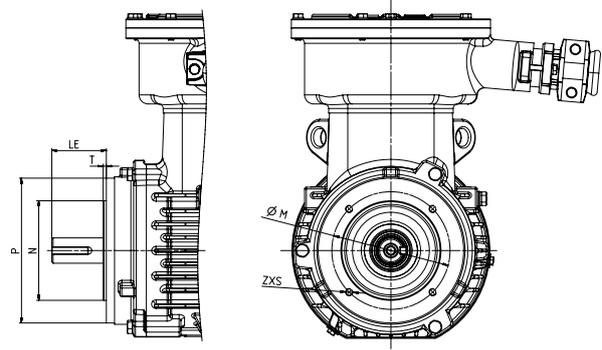

IM B5法兰尺寸 IM B5 flange dimensions

机座号 Frame size	法兰带通孔 (FF/A) Flange with holes	尺寸 Dimension							
	DIN / EN 50347	LA	LE	M	N	P	T	S	Z
80	FF165	10	40	165	130	200	3.5	12	4
90	FF165	11	50	165	130	200	3.5	12	4
100	FF215	13	60	215	180	250	4	14.5	4
112	FF215	13	60	215	180	250	4	14.5	4
132	FF265	15	80	265	230	300	4	14.5	4
160	FF300	18	110	300	250	350	5	18.5	4
180	FF300	18	110	300	250	350	5	18.5	4
200	FF350	20	110	350	300	400	5	18.5	4
225	FF400	20	110/140	400	350	450	5	18.5	8
250	FF500	22	140	500	450	550	5	18.5	8
280	FF500	25	140	500	450	550	5	18.5	8
315	FF600	25	140/170	600	550	660	6	24	8
355	FF740	25	140/170	740	680	800	6	24	8

IM B14法兰尺寸 IM B14 flange dimensions

机座号 Frame size	法兰带通孔 (FF/A) Flange with blind holes	尺寸 Dimension							
	DIN / EN 50347	LA	LE	M	N	P	T	S	Z
80	FT100	-	40	100	80	120	3	M6x15	4
90	FT115	-	50	115	95	132	3	M8x16	4
100	FT130	-	60	130	110	160	3.5	M8x17	4
112	FT130	-	60	130	110	160	3.5	M8 × 17	4
132	FT165	-	80	165	130	200	3.5	M10x20	4
160	FT215	-	110	215	180	250	4	M12x25	4

<sup>1)</sup> 上表中S尺寸为螺纹规格×孔深(例: M12×23表示螺纹规格M12, 螺纹孔深度23mm)。

<sup>1)</sup> Dimension S in the table includes screw thread x depth. (eg: M12 x 23 means screw thread is M12 and the depth is 23 mm)

# 认证 Certificates



## 茵梦达电机（中国）有限公司

地址：江苏省仪征市汽车工业园众鑫路99号

电话：+86 514 85718108

传真：+86 514 85718083

邮编：211400

邮箱：[motorservice.ssml.cn@innomotics.com](mailto:motorservice.ssml.cn@innomotics.com)

网址：[www.beide-motor.cn](http://www.beide-motor.cn)

茵梦达电机（中国）有限公司版权所有，如有改动恕不事先通知。